PHAP15-00007

Date:	March 6, 2015 (Postponed from February 23, 2015)
Application Type:	Certificate of Appropriateness
Property Owner:	The Venice Group
Representative:	Carlos Silveyra
Legal Description:	Being Fr. 7 Alexander 9 & 10, City of El Paso, City of El Paso, El Paso County, Texas
Historic District:	Sunset Heights
Location:	1319 N. El Paso Street
Representative District:	#8
Existing Zoning:	A-3/H (Apartment/Historic)
Year Built:	1930
Historic Status:	Non-Contributing
Request:	Certificate of Appropriateness for the removal and replacement of doors and windows and the installation of through-wall grilles after-the-fact
Application Filed:	2/9/2015
45 Day Expiration:	3/26/2015

ITEM #1

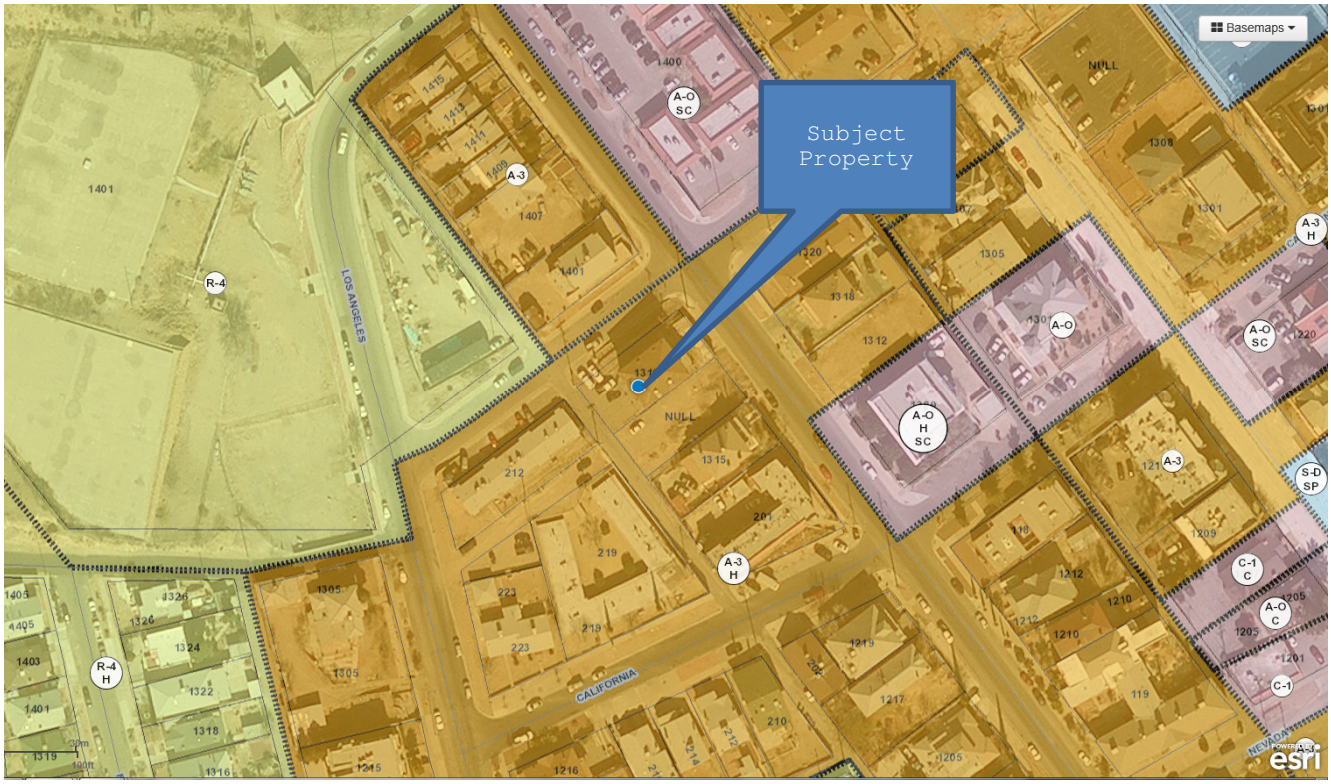

GENERAL INFORMATION:

The applicant seeks approval for:

Certificate of Appropriateness for the removal and replacement of doors and windows and the installation of through-wall grilles after-the-fact

STAFF RECOMMENDATION:

The Historic Preservation Office recommends DENIAL of the proposed scope of work based on the following recommendations:

The Design Guidelines for El Paso's Historic Districts, Sites, and Properties recommend the following*:*

- *Doors and windows are considered important character-defining features because of significant detailing.*
- *When windows are involved in the construction process it is recommended to repair rather than replace.*
- *However, if windows are damaged beyond repair, replacement windows should match the type (such as double hung), style (for example six panes over six panes), and finish (paint). Replacement windows on the main façade shall be comprised of the operable portions of the window and match the type, style, operation, configuration and finish of the original windows.*
- *Do not use single pane picture windows or horizontal sliding windows if they are not the original window types.*
- *Installation of windows similar to the original in appearance and structural purpose, regardless of construction materials is permitted.*
- *Windows in secondary facades shall be reviewed on a case by case basis.*
- *The size of the door or window opening should not be altered. New doors and windows should be constructed to fit into the existing opening.*
- *Retain and preserve the pattern, arrangement, and dimensions of door and window openings on principal elevations. Often the placement of doors and windows is an indicator of a particular architectural style, and therefore contributes to the building's significance. Doors and windows for new construction and additions should be compatible in proportion, location, shape, pattern, size, and details to existing units.*
- *Retain and preserve original doors and windows, including such elements as sash, glass, sills, lintels, casings, muntins, trim, frames, thresholds, hardware and shutters. If repair of an original window or door element is necessary, repair only the deteriorated element to match the original in size, composition, material, dimension, and detail by patching, splicing, consolidating, or otherwise reinforcing the deteriorated section. The removal of historic materials should be avoided.*
- *When repair is not feasible, door and window products will be reviewed on an individual basis using the following criteria: a. Architectural and historical compatibility; b. Comparison to original profile; c. Level of significance of original doors and windows to the architectural style of the building; d. Three dimensional exterior applied muntins that simulate or match the original muntins may be approved. Single dimension interior applied muntins are not appropriate.*
- *For commercial and/or institutional buildings, or the replacement of steel casement windows, if it is not feasible to repair original windows, select replacement products that are compatible in proportion, location, shape, pattern, size, and details to the original window component.*
- *Visible door styles must be matched to the building's architectural style. An*

inappropriate door will require review by the HLC.

- *If a new mechanical system is needed, install it so that it causes the least amount of alteration to the building's exterior facades, historic building fabric, and site features.*
- *Locate new mechanical equipment and utilities, including heating and air-conditioning units, meters, exposed pipes, and fuel tanks, in the most inconspicuous area, usually along a building's rear façade, screened from public view.*

The Secretary of the Interior's Standards for Rehabilitation recommend the following:

- *The removal of distinctive materials or alteration of features, spaces, and spatial relationships that characterize a property will be avoided.*

- *Changes to a property that have acquired historic significance in their own right will be retained and preserved.*

- *Distinctive materials, features, finishes, and construction techniques or examples of craftsmanship that characterize a property will be preserved.*

- *Deteriorated historic features will repaired rather than replaced. Where the severity of deterioration requires replacement of a distinctive feature, the new feature will match the old in design, color, texture, and where possible, materials. Replacement of missing features will be substantiated by documentary and physical evidence.*

AERIAL MAP

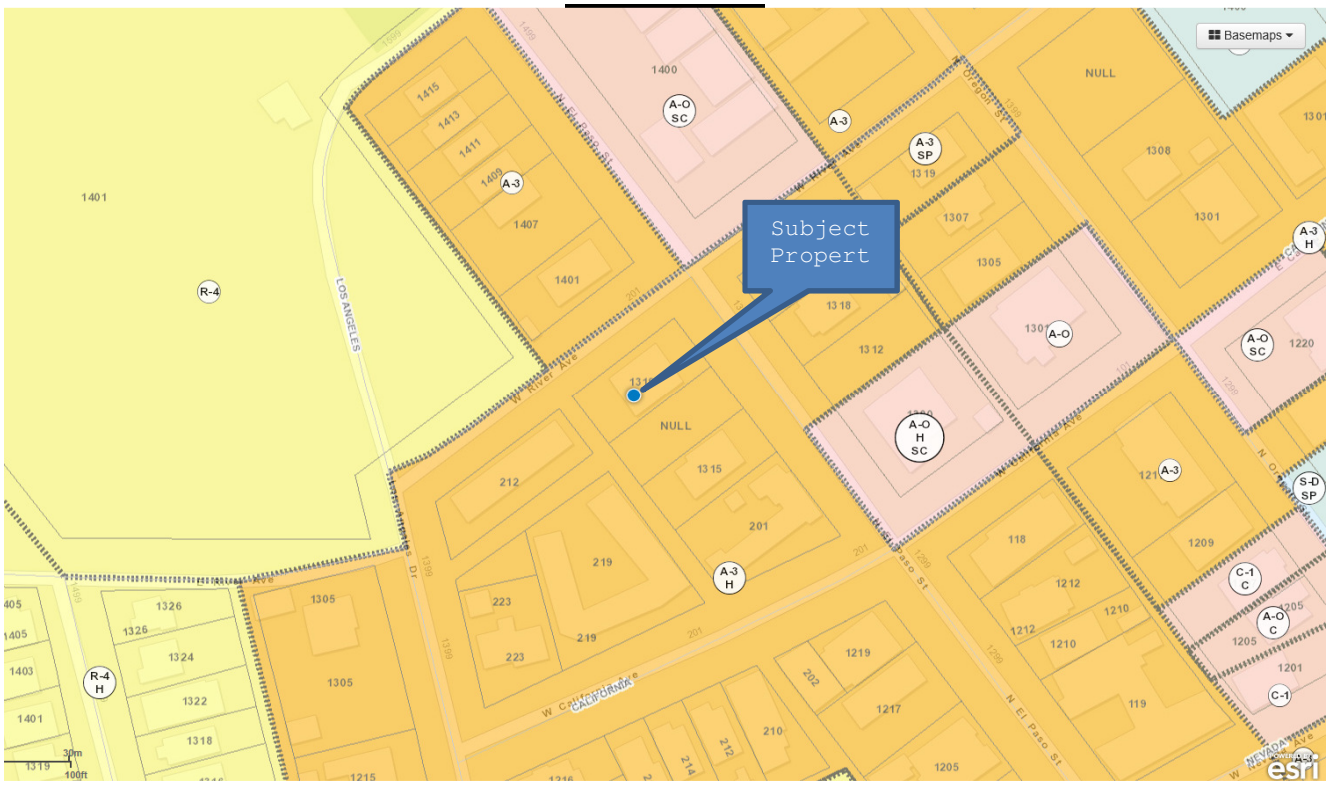
Subject Propert
Basemaps
NULL
LOS ANGELES
W River Ave
W California Ave
N El Paso St
R-4
A-3
A-O SC
A-3 SP
A-O
A-O H SC
A-3 H
S-D SP
C-1 C
A-O C
C-1
R-4 H
1400
1401
1407
1415
1413
1411
1409
1308
1301
1307
1305
1318
1312
1315
1220
1209
1212
1210
1219
1217
1205
1201
1326
1324
1322
1318
1403
1215
212
219
223
201
118
119
202
210
30m
100ft
esri

PHOTOGRAPHS OF THE PROPERTY

WINDOW INFORMATION

VINYL

1110 SERIES SINGLE HUNG

STANDARD FEATURES

- Energy-efficient Warm Edge insulating glass
- Dual lift rails on bottom sash for easy operation
- Bottom sash tilts in and is removable for easy cleaning
- Maintenance-free multi-chamber PVC construction
- Integral nail fin (shown) with 1" or 1 3/8" setback or flange for simple installation
- Flush mounted tilt latches
- Traditional brick mould profile with 2 3/8" frame depth
- Interior glazed top sash
- Exterior glazed bottom sash
- Cam locks and keepers
- Block and tackle balances
- Fully fusion-welded corners on sash and frame for superior structural strength

OPTIONS

GLASS OPTIONS:
Low-E, Low-E[SC], HP, HP[SC], Warm Edge+, obscure and tempered

GRILLE OPTIONS:
Color-coordinated grilles-between-the-glass (GBG) in 5/8" and 7/8" flat

PRODUCT CONFIGURATION:
Singles, twins, triples, fixed, combinations and a wide variety of architectural shapes

HARDWARE OPTION:
Safety vent latch to meet ASTM F2090-2030 requirements

COLOR OPTIONS:
WHITE, BEIGE, CLAY

NOTE: Colors shown are close approximations and may not be accurate representations for color matching. Please request color swatches from your Ply Gem sales representative to do so.

SINGLE HUNG SELECTION GUIDE

SERIES	SIZE (IN. WIDTH)	TRIM MOULD (WITH SCREW)	HIGH BURN (WITH SCREW)	CHARDON (WITHOUT SCREW)	CONSTRUCTION TYPE: WOOD FRAME	BRICK	ALUMINUM STUDS	BLOCK	ICF
1110	1"				●	●	●		
1110CN	7/16"				●	●			●
1111	1"		●	14282	●	●	●		
1111FL	FLANGE		●	10836				●	
1111CN	7/16"		●	14865	●	●			●
1110B	1"	●			●	●	●		
1110BN	7/16"	●			●	●			●

THERMAL PERFORMANCE

	R Value	NFRC CERTIFIED[1] U Factor	SHGC	VT
WITH WARM EDGE				
3/4" Clear	2.04	0.49	0.62	0.66
3/4" Low-E	2.08	0.35	0.33	0.56
3/4" Low-E[SC]	2.08	0.35	0.33	0.40
WITH WARM EDGE+				
3/4" HP Glass	2.33	0.31	0.33	0.56
3/4" HP[SC] Glass	2.33	0.30	0.22	0.40

[1] All units are NAMI certified and rated in accordance with NFRC 100/200 standards by an AAMA accredited lab. Performance values reflect the performance of units tested with the following configuration: 36" 1110, 3mm glass and no grilles.

R VALUE: Resistance ambient air flow; U FACTOR: Rate of heat loss; SHGC: Solar Heat Gain Coefficient; VT: Visible Transmittance

1. Optional Low-E or Low-E[SC] (solar cooling) available.
2. Optional HP glass, combining Low-E with argon gas fill, or HP[SC] glass, combining Low-E[SC] with argon gas fill, available for high performance.
3. Optional Warm Edge+ spacer system for enhanced performance.

© 2012 Ply Gem Industries, Inc. NCS-SSIIIBSH-1212-H-PMG-REV.J SKU#: 2791070101187

NAHB RESEARCH CENTER GREEN APPROVED

PLY GEM BUILDER SERIES 1110 WINDOWS HAVE BEEN GREEN APPROVED BY THE NAHB RESEARCH CENTER.

This means you can be assured that Ply Gem Builder Series 1110 windows comply with specific green practice criteria in the National Green Building Standard. Visit www.GreenApprovedProducts.com for more details.

PLY GEM