

**CITY OF EL PASO, TEXAS  
REQUEST FOR COUNCIL ACTION (RCA)**

**DEPARTMENT:** Engineering  
**AGENDA DATE:** May 30, 2006

**CONTACT PERSON/PHONE:** Rick Conner, City Engineer (X4423)  
**DISTRICT (S) AFFECTED:** 8  
**PROJECT NAME/SOLICITATION NO.** Resler Canyon Erosion Control Improvements, 2006-099

**SUBJECT:**

The Engineering Department and Frontera Land Alliance recommend the award of contract no. 2006-099, Resler Canyon Erosion Control Improvements, to CK Construction, Inc., the low responsible, responsive bidder. This unit priced contract is for an estimated amount of \$347,791.00. The Resler Canyon Erosion Control Improvements project was created and funded as a result of a legal settlement agreement.

Work under the unit price component is only an estimated value and will be ordered, performed, invoiced and paid by measured quantity. The actual cost of the unit price component will be the sum total of unit prices at the end of the contract term.

As part of the award of this contract, the City Engineer is authorized to approve contract changes which are necessary for proper construction of the work and carrying out the intent of the design, in an amount not to exceed \$25,000 per numbered change order, and not to exceed the total of 25% of the original contract price as awarded, without further authorization by City Council. It is requested that the City Manager of the City of El Paso be authorized to sign the referenced contract.

**BACKGROUND / DISCUSSION:**

The completion of this project will assist in the preservation of a cultural resource by controlling some of the water runoff entering Resler Canyon. The city designed and bid out the project under solicitation number 2006-099. The lowest responsible, responsive bidder is CK Construction Inc. Although the plans were prepared for seven (7) locations, only five (5) of the locations were selected due to budget constraints. The locations chosen for improvement were location numbers 1, 2, 3, 5, and 6. These locations were recommended by both the Engineering Department and the Frontera Land Alliance.

**PRIOR COUNCIL ACTION:**

Legal agreement reached with Frontera Land Alliance on November 3, 2005.


**AMOUNT AND SOURCE OF FUNDING:**

This project is funded by, the FY03 Certificates of Obligation.  
Funding is provided in 31260001-PFC06001-60600-508027.

**BOARD / COMMISSION ACTION:**

N/A

\*\*\*\*\*REQUIRED AUTHORIZATION\*\*\*\*\*

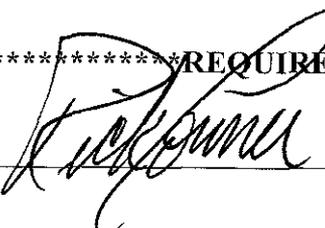**LEGAL:** (if required)  **FINANCE:** (if required) \_\_\_\_\_

**DEPARTMENT HEAD:** \_\_\_\_\_

*05*

(Example: if RCA is initiated by Financial Services, client department should sign also)  
*Information copy to appropriate Deputy City Manager*

**APPROVED FOR AGENDA:**

**CITY MANAGER:** \_\_\_\_\_

**DATE:** \_\_\_\_\_

# RECOMMENDATION CITY COUNCIL



JOHN COOK  
MAYOR

JOYCE WILSON  
CITY MANAGER

ANN MORGAN LILLY, DISTRICT 1  
SUSANNAH M. BYRD, DISTRICT 2  
J. ALEXANDRO LOZANO, DISTRICT 3  
MELINA CASTRO, DISTRICT 4  
PRESI ORTEGA, JR., DISTRICT 5  
EDDIE HOLGUIN JR., DISTRICT 6  
STEVE ORTEGA, DISTRICT 7  
BETO O'ROURKE, DISTRICT 8

## ENGINEERING DEPARTMENT

May 12, 2006

 **FILE**

**TO:** Rick Talamo  
Capital Projects Manager

**FROM:** Bashar Abugalyon, P.E.   
Engineering Design Manager

**SUBJECT:** Resler Canyon Erosion Control Improvements

---

We have reviewed and analyzed the bid tabulations on the above-mentioned project. We recommend that the apparent lowest bidder, CK Construction, Inc., be awarded the contract as follows:

Location 1: Alto Mesa Dr. and Mesa St.	\$197,650.00
Location 2: Parking Area at 200 Alto Mesa Dr.	\$ 56,200.00
Location 3: 300 Alto Mesa Dr.	\$ 16,200.00
Location 5: Pizarro Dr.	\$ 51,891.00
Location 6: Marcena St.	\$ 25,850.00
<b>Total</b>	<b>\$347,791.00</b>

If you have any questions, you can reach me at (915) 541-4430.

# THE FRONTERA LAND ALLIANCE

*A private, non-profit organization dedicated to preserving significant lands  
that maintain and enhance the natural environment and cultural heritage  
of the Northern Chihuahuan Desert Region.*



10 May 2006

 **FILE**

Mr. Rick Conner  
City Engineer  
2 Civic Center Plaza – 4<sup>th</sup> Floor  
El Paso, TX 79901-1196

**RECOMMENDATION**

Dear Mr. Conner:

The Board of The Frontera Land Alliance has reviewed the Bid Tabulations for the Resler Canyon projects. We have selected five of the seven projects that were proposed and bid upon. The selection was based on the low bidder's prices. The selected projects are:


Location 1: Alto Mesa Dr. and Mesa St.	\$197,650.00
Location 2: Parking Area at 200 Alto Mesa Dr.	\$ 56,200.00
Location 3: 300 Alto Mesa Dr.	\$ 16,200.00
Location 5: Pizarro Dr.	\$ 51,891.00
Location 6: Marcena St.	\$ 25,850.00
<b>Total Costs</b>	<b>\$347,791.00</b>

This total exceeds the allotted amount by \$2,791.00. Please let me know if this is a problem and we will rework our request.

If this selection is acceptable, please let us know when we can get together with someone from Engineering and the selected contractor to walk the proposed routes for the contractor to use while doing the work.

Sincerely yours,

Scott Cutler  
Secretary  
The Frontera Land Alliance

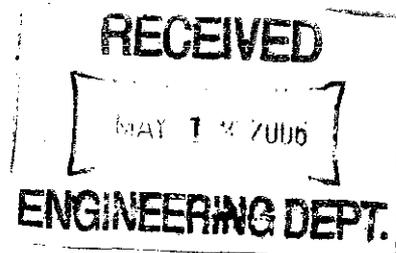

# **Resler Canyon Erosion Control Improvements Solicitation No. 2006-099**

## **Scope of Work**

The Resler Canyon Erosion Control Improvements consist of providing all labor, equipment, material and incidentals.

The demolition work for all sites consists of, but is not limited, to removing and disposing off-site, clearing and grubbing.

### **Location 1 (Alto Mesa Drive & Mesa Street)**

The project will consist of removal of debris and vegetation along a portion of the arroyo and at the existing concrete outlet structure. The proposed work will include excavation and then placement of erosion control material consisting of boulders and loose rock riprap, per the plans.

### **Location 2 (Parking Area at 200 Alto Mesa Drive)**

The project will consist of repairs to an existing concrete spillway at 200 Alto Mesa Drive. Repairs will consist of injecting cement stabilized backfill under the existing concrete spillwall, as well as adding concrete curb at the upstream side of the flume adjacent to the parking area, and adding boulders with cement stabilized backfill along both sides and bottom of existing concrete spillway. Improvements will also include loose rock rip rap, as per the plans.

### **Location 3 (300 Alto Mesa Drive)**

The project will consist of anchoring metal straps to an existing exposed corrugated metal pipe and installing loose rock rip rap at the outlet structure, as per the plans.

### **Location 4 (Concrete Drainage Flume at Pizarro Cul-De-Sac)**

The project will consist of placing rock rip rap at end of an existing concrete flume to control erosion problems at end of the flume located at the end of the Pizarro Cul-De-Sac.

### **Location 5 (Pizarro Drive)**

The project will consist of removing an existing corrugated metal pipe storm sewer system and replacing it with a new eighteen-inch reinforced concrete pipe, along with an inlet. Installation of rock rip rap, and curb will also be included.

**Location 6 (Marcena Street)**

The project will consist of removal and reinstallation of guardrail and dead end sign and installing new gabions at end of Marcena Street, as per the plans.

**Location 7 (El Cajon Drive)**

The project will include the construction of a new concrete flume, as well as placing gabions. Improvements also include the installation of guardrail and dead end sign on El Cajon Drive.

**The owner has the right to choose none, one, or more locations, but only one contractor shall be selected for all work.**

**NOTE:** Contractor shall utilize existing access only to each site. If no existing access exists, the equipment and material shall be transported by crane, or in a method approved in writing by the Director of Engineering.

**There shall be no additional damage to the arroyo.**

The project will be accomplished as shown on the plans or as approved by the City of El Paso Engineering Department. All work shall begin at issuance of written Notice to Proceed, and must be completed within the indicated time frame.

- The contractor shall include an approved traffic control plan for construction where required.
- The Contractor acknowledges that this Project consists of Locations and the Contractor agrees that each Location work must be completed and accepted by the Owner before a written Notice to Proceed is issued for the next Location of the Project.

Prior to commencement of any work, the contractor should submit and obtain approval from El Paso Engineering Department for the Sequence of Construction, Schedule of Work, Traffic Control Plan, and Haul/Waste Route to an approved disposal site. The contractor shall provide written approved documentation from the owner or operator of the waste site.

The description of the scopes of work, as shown above, are only a general overview. Contractor shall refer to the project plans and specifications for further information.

**This is a Unit Price Project.**

# CITY OF EL PASO BID TABULATION

BID TITLE: RESLER CANYON EROSION CONTROL IMPROVEMENTS

BID NO: 2006-099

BID DATE: APRIL 19, 2006

**"REVISED" (4-24-2006)**

DEPARTMENT: STREETS

				C.F. JORDAN L.P. EL PASO, TEXAS		CK CONSTRUCTION, INC. EL PASO, TEXAS							
ITEM #	DESCRIPTION	EST QTY	UNIT	BID PRICE PER UNIT	TOTAL	BID PRICE PER UNIT	TOTAL	BID PRICE PER UNIT	TOTAL	BID PRICE PER UNIT	TOTAL	BID PRICE PER UNIT	TOTAL
<b>LOCATION 1 ALTO MESA DRIVE AND MESA STREET</b>													
1.	CLEAR AND GRUB	1	LS	\$5,000.00	\$5,000.00	\$15,000.00	\$15,000.00		\$0.00		\$0.00		\$0.00
2.	FURNISH AND INSTALL 4" - 6" KICKER STONE (COMPLETE IN PLACE)	180	TON	\$97.00	\$17,460.00	\$55.00	\$9,900.00		\$0.00		\$0.00		\$0.00
3.	FURNISH & INSTALL 2' - 2' BOULDER (COMPLETE IN PLACE)	1,600	EACH	\$128.00	\$204,800.00	\$100.00	\$160,000.00		\$0.00		\$0.00		\$0.00
4.	SW3P BEST MANAGEMENT PRACTICES (COMPLETE IN PLACE)	1	LS	\$3,400.00	\$3,400.00	\$750.00	\$750.00		\$0.00		\$0.00		\$0.00
5.	FURNISH & INSTALL 1' BUILDING STONE (COMPLETE IN PLACE)	150	TON	\$100.00	\$15,000.00	\$80.00	\$12,000.00		\$0.00		\$0.00		\$0.00
<b>TOTL BID LOCATION NO. 1</b>					<b>\$245,660.00</b>		<b>\$197,650.00</b>		<b>\$0.00</b>		<b>\$0.00</b>		<b>\$0.00</b>
<b>COMPLETION TIME FOR LOCATION #1 IS 14 CALENDAR DAYS</b>													
<b>LOCATION 2 PARKING AREA AT 200 ALTO MESA DRIVE</b>													
1	CLEAR AND GRUB	1	LS	\$5,000.00	\$5,000.00	\$5,000.00	\$5,000.00		\$0.00		\$0.00		\$0.00
2	FURNISH & INSTALL 6-INCH CONCRETE CURB & GUTTER (INCLUDES, SAW-CUT EXCAVATION, BACKFILL & COMPACT SUBGRADE) COMPLETE IN PLACE	30	LF	\$18.00	\$540.00	\$20.00	\$600.00		\$0.00		\$0.00		\$0.00
3	FURNISH & INSTALL 2 SACK CEMENT STABILIZED BACKFILL (COMPLETE IN PLACE)	360	CY	\$110.00	\$39,600.00	\$90.00	\$32,400.00		\$0.00		\$0.00		\$0.00
4	FURNISH AND INSTALL 6" - 12" LOOSE RIP RAP (COMPLETE IN PLACE)	140	TON	\$120.00	\$16,800.00	\$70.00	\$9,800.00		\$0.00		\$0.00		\$0.00
5	FURNISH & INSTALL 1' BUILDING STONE (COMPLETE IN PLACE)	60	TON	\$92.00	\$5,520.00	\$115.00	\$6,900.00		\$0.00		\$0.00		\$0.00
6	SW3P BEST MANAGEMENT PRACTICES (COMPLETE IN PLACE)	1	LS	\$3,400.00	\$3,400.00	\$1,500.00	\$1,500.00		\$0.00		\$0.00		\$0.00
<b>TOTAL BID LOCATION NO. 2</b>					<b>\$70,860.00</b>		<b>\$56,200.00</b>		<b>\$0.00</b>		<b>\$0.00</b>		<b>\$0.00</b>
<b>COMPLETION TIME FOR LOCATION # 2 IS 14 CALENDAR DAYS</b>													

CHECKED BY: *Michael W. Plun* 4-24-06

# CITY OF EL PASO BID TABULATION

BID TITLE: RESLER CANYON EROSION CONTROL IMPROVEMENTS

BID NO: 2006-099

BID DATE: APRIL 19, 2006

**"REVISED" (4-24-2006)**

DEPARTMENT: STREETS

		C.F. JORDAN L.P. EL PASO, TEXAS		CK CONSTRUCTION, INC. EL PASO, TEXAS								
ITEM #	DESCRIPTION	EST. QTY.	BID PRICE PER UNIT	TOTAL	BID PRICE PER UNIT	TOTAL	BID PRICE PER UNIT	TOTAL	BID PRICE PER UNIT	TOTAL	BID PRICE PER UNIT	TOTAL
<b>LOCATION 3 300 ALTO MESA DRIVE</b>												
1	CLEAR AND GRUB	1	LS	\$5,000.00	\$5,000.00	\$7,000.00	\$7,000.00		\$0.00		\$0.00	\$0.00
2	FURNISH AND INSTALL 6" - 12" LOOSE RIP RAP (COMPLETE PLACE)	70	TON	\$120.00	\$8,400.00	\$70.00	\$4,900.00		\$0.00		\$0.00	\$0.00
3	FURNISH AND INSTALL METAL STRAPS & CONCRETE FOOTINGS (COMPLETE IN PLACE)	7	EACH	\$1,400.00	\$9,800.00	\$400.00	\$2,800.00		\$0.00		\$0.00	\$0.00
4	SW3P BEST MANAGEMENT PRACTICES (COMPLETE IN PLACE)	1	LS	\$3,400.00	\$3,400.00	\$1,500.00	\$1,500.00		\$0.00		\$0.00	\$0.00
<b>TOTAL BID LOCATION NO. 3</b>					\$26,600.00		\$16,200.00		\$0.00		\$0.00	\$0.00
<b>COMPLETION TIME FOR LOCATION # 3 IS 7 CALENDAR DAYS</b>												
<b>LOCATION 4 (CONCRETE DRAINAGE FLUME AT PIZARRO CUL-DE-SAC)</b>												
1	CLEAR AND GRUB	1	LS	\$5,000.00	\$5,000.00	\$6,000.00	\$6,000.00		\$0.00		\$0.00	\$0.00
2	FURNISH AND INSTALL 6" - 12" KICKER RIP RAP (COMPLETE IN PLACE)	45	TON	\$120.00	\$5,400.00	\$70.00	\$3,150.00		\$0.00		\$0.00	\$0.00
3	SW3P BEST MANAGEMENT PRACTICES (COMPLETE IN PLACE)	1	LS	\$3,400.00	\$3,400.00	\$1,500.00	\$1,500.00		\$0.00		\$0.00	\$0.00
4	TRAFFIC CONTROL, DURATION OF PROJECT	1	LS	\$4,000.00	\$4,000.00	\$1,000.00	\$1,000.00		\$0.00		\$0.00	\$0.00
<b>TOTAL BID LOCATION NO. 4</b>					\$17,800.00		\$11,650.00		\$0.00		\$0.00	\$0.00
<b>COMPLETION TIME FOR LOCATION # 4 IS 7 CALENDAR DAYS</b>												

CHECKED BY: *MMP*

# CITY OF EL PASO BID TABULATION

BID TITLE: RESLER CANYON EROSION CONTROL IMPROVEMENTS

BID NO: 2006-099

BID DATE: APRIL 19, 2006

"REVISED" (4-24-2006)

DEPARTMENT: STREETS

			C.F. JORDAN L.P. EL PASO, TEXAS		CK CONSTRUCTION, INC. EL PASO, TEXAS								
ITEM #	DESCRIPTION	EST. QTY.		BID PRICE PER UNIT	TOTAL	BID PRICE PER UNIT	TOTAL	BID PRICE PER UNIT	TOTAL	BID PRICE PER UNIT	TOTAL	BID PRICE PER UNIT	TOTAL
<b>LOCATION 5 ( PIZARRO DRIVE )</b>													
1	CLEAR AND GRUB	1	LS	\$5,000.00	\$5,000.00	\$8,500.00	\$8,500.00		\$0.00		\$0.00		\$0.00
2	REMOVE AND DISPOSE OF CORRUGATED METAL PIPE	65	LF	\$40.00	\$2,600.00	\$70.00	\$4,550.00		\$0.00		\$0.00		\$0.00
3	REMOVE & REPLACE GUARDRAIL INCLUDING FOOTING	40	LF	\$40.00	\$1,600.00	\$125.00	\$5,000.00		\$0.00		\$0.00		\$0.00
4	REMOVE AND REPLACE DEAD END SIGN (INCLUDES INSTALATION)	1	EACH	\$600.00	\$600.00	\$1,200.00	\$1,200.00		\$0.00		\$0.00		\$0.00
5	FURNISH AND INSTALL 2- INCH HOT-MIX ASPHALTIC CONCRETE PAVEMENT, 6" CSB, 6" SUBGRADE (COMPLETE IN PLACE)	12	SY	\$490.00	\$5,880.00	\$325.00	\$3,900.00		\$0.00		\$0.00		\$0.00
6	SAW CUT EXISTING PAVEMENT (INCLUDES CLEAN UP)	12	SY	\$43.00	\$516.00	\$60.00	\$720.00		\$0.00		\$0.00		\$0.00
7	FURNISH AND INSTALL 6-INCH CONCRETE CURB & GUTTER (INCLUDES SAW-CUT EXCAVATION, BACKFILL, & COMPACT SUBGRADE) (COMPLETE IN PLACE)	40	LF	\$17.00	\$680.00	\$33.00	\$1,320.00		\$0.00		\$0.00		\$0.00
8	FURNISH AND INSTALL NEW TRAFFIC SIGN POST (COMPLETE IN PLACE)	1	EACH	\$440.00	\$440.00	\$600.00	\$600.00		\$0.00		\$0.00		\$0.00
9	FURNISH & INSTALL CAST-IN-PLACE TYPE I INLET ( 1 GRATE ) COMPLETE	1	EACH	\$6,500.00	\$6,500.00	\$3,800.00	\$3,800.00		\$0.00		\$0.00		\$0.00
10	FURNISH AND INSTALL 18-INCH RCP (CL III) (COMPLETE) INCLUDES PLACEMENT, BACKFILL & COMPACTION	100	LF	\$93.00	\$9,300.00	\$160.01	\$16,001.00		\$0.00		\$0.00		\$0.00
11	FURNISH & INSTALL 6" - 12" LOOSE RIP RAP (COMPLETE IN PLACE)	40	TON	\$120.00	\$4,800.00	\$60.00	\$2,400.00		\$0.00		\$0.00		\$0.00
12	SW3P BEST MANAGEMENT PRACTICES (COMPLETE IN PLACE)	1	LS	\$3,400.00	\$3,400.00	\$1,500.00	\$1,500.00		\$0.00		\$0.00		\$0.00
13	TRAFFIC CONTROL, DURATION OF PROJECT	1	LS	\$4,000.00	\$4,000.00	\$1,700.00	\$1,700.00		\$0.00		\$0.00		\$0.00
14	TRENCH SAFETY SYSTEM	100	LF	\$3.00	\$300.00	\$7.00	\$700.00		\$0.00		\$0.00		\$0.00

CHECKED BY: *MWP*

# CITY OF EL PASO BID TABULATION

BID TITLE: RESLER CANYON EROSION CONTROL IMPROVEMENTS

BID NO: 2006-099

BID DATE: APRIL 19, 2006

"REVISED" (4-24-2006)

DEPARTMENT: STREETS

				C.F. JORDAN L.P. EL PASO, TEXAS		CK CONSTRUCTION, INC. EL PASO, TEXAS							
ITEM #	DESCRIPTION	EST. QTY.		BID PRICE PER UNIT	TOTAL	BID PRICE PER UNIT	TOTAL	BID PRICE PER UNIT	TOTAL	BID PRICE PER UNIT	TOTAL	BID PRICE PER UNIT	TOTAL
<b>TOTAL BID LOCATION NO. 5 COMPLETION TIME FOR LOCATION # 5 IS 7 CALENDAR DAYS</b>					\$45,616.00		\$51,891.00		\$0.00		\$0.00		\$0.00
<b>LOCATION 6 ( MARCENA STREET )</b>													
1	CLEAR AND GRUB	1	LS	\$5,000.00	\$5,000.00	\$6,000.00	\$6,000.00		\$0.00		\$0.00		\$0.00
2	REMOVE AND REPLACE GUARDRAIL, INCLUDING FOOTINGS	70	LF	\$40.00	\$2,800.00	\$85.00	\$5,950.00		\$0.00		\$0.00		\$0.00
3	REMOVE AND REPLACE DEAD END SIGN ( COMPLETE IN PLACE )	1	EACH	\$600.00	\$600.00	\$1,100.00	\$1,100.00		\$0.00		\$0.00		\$0.00
4	FURNISH AND INSTALL GABIONS 3" X 3' X 6' GALVANIZED WIRE WITH 3" TO 6" ROCK INSTALLED (COMPLETE IN PLACE, INCLUDING 6 OZ. NON-WOVEN GEOTEXTILE FABRIC)	40	EACH	\$422.00	\$16,880.00	\$245.00	\$9,800.00		\$0.00		\$0.00		\$0.00
5	SW3P BEST MANAGEMENT PRACTICES (COMPLETE IN PLACE)	1	LS	\$3,400.00	\$3,400.00	\$1,500.00	\$1,500.00		\$0.00		\$0.00		\$0.00
6	TRAFFIC CONTROL, DURATION OF PROJECT	1	LS	\$3,000.00	\$3,000.00	\$1,500.00	\$1,500.00		\$0.00		\$0.00		\$0.00
<b>TOTAL BID LOCATION NO. 6 COMPLETION TIME FOR LOCATION # 6 IS 7 CALENDAR DAYS</b>					\$31,680.00		\$25,850.00		\$0.00		\$0.00		\$0.00
<b>LOCATION 7 ( EL CAJON DRIVE )</b>													
1	CLEAR AND GRUB	1	LS	\$5,000.00	\$5,000.00	\$55,000.00	\$55,000.00		\$0.00		\$0.00		\$0.00
2	REMOVE AND REPLACE DEAD END SIGN (COMPLETE IN PLACE)	1	EACH	\$600.00	\$600.00	\$1,100.00	\$1,100.00		\$0.00		\$0.00		\$0.00

CHECKED BY: *MVP*

## CITY OF EL PASO BID TABULATION

BID TITLE: RESLER CANYON EROSION CONTROL IMPROVEMENTS

BID NO: 2006-099

BID DATE: APRIL 19, 2006

**"REVISED" (4-24-2006)**

DEPARTMENT: STREETS

			C.F. JORDAN L.P. EL PASO, TEXAS		CK CONSTRUCTION, INC. EL PASO, TEXAS							
ITEM #	DESCRIPTION	EST. QTY.	BID PRICE PER UNIT	TOTAL	BID PRICE PER UNIT	TOTAL	BID PRICE PER UNIT	TOTAL	BID PRICE PER UNIT	TOTAL	BID PRICE PER UNIT	TOTAL
3	REMOVE AND REPLACE GUARDRAIL INCLUDING FOOTINGS	40 LF	\$40.00	\$1,600.00	\$95.00	\$3,800.00		\$0.00		\$0.00		\$0.00
4	FURNISH AND INSTALL 18-INCH CONCRETE CURB & GUTTER (INCLUDES SAW-CUT EXCAVATION BACKFILL & COMPACT SUBGRADE) (COMPLETE IN PLACE)	180 LF	\$18.00	\$3,240.00	\$23.00	\$4,140.00		\$0.00		\$0.00		\$0.00
5	FURNISH AND INSTALL NEW FILL (COMPLETE IN PLACE)	4,000 CY	\$13.00	\$52,000.00	\$18.50	\$74,000.00		\$0.00		\$0.00		\$0.00
6	FURNISH AND INSTALL CONCRETE FLUME (COMPLETE IN PLACE)	125 SY	\$74.00	\$9,250.00	\$100.00	\$12,500.00		\$0.00		\$0.00		\$0.00
7	FURNISH AND INSTALL GABIONS 3'X3'X 6' GALVANIZED WIRE WITH ROCK INSTALLED (COMPLETE IN PLACE, INCLUDING 6 OZ. NON-WOVEN GEOTEXTILE FABRIC)	620 EACH	\$422.00	\$261,640.00	\$180.00	\$111,600.00		\$0.00		\$0.00		\$0.00
8	SW3P BEST MANAGEMENT PRACTICES (COMPLETE IN PLACE)	1 LS	\$3,400.00	\$3,400.00	\$2,500.00	\$2,500.00		\$0.00		\$0.00		\$0.00
9	TRAFFIC CONTROL, DURATION OF PROJECT	1 LS	\$4,000.00	\$4,000.00	\$1,500.00	\$1,500.00		\$0.00		\$0.00		\$0.00
<b>TOTAL BID LOCATION NO. 7 COMPLETION TIME FOR LOCATION # 7 IS 21 CALENDAR DAYS</b>				\$340,730.00		\$266,140.00		\$0.00		\$0.00		\$0.00
BID BOND SUBMITTED			YES		YES							
AMENDMENTS ACKNOWLEDGED			YES		YES							

CHECKED BY: *Michael W. Plo* 4-29-06