

CITY OF EL PASO, TEXAS
REQUEST FOR COUNCIL ACTION (RCA)

DEPARTMENT: Engineering
AGENDA DATE: August 7, 2007 Terrence Freiburg, Purchasing Mgr. ext 4313
CONTACT PERSON/PHONE: Daryl W. Cole, Director, Streets Department, Ph. (915) 621-6750
PROJECT NAME/SOLICITATION NO. Citywide Repair/Construction of Parkway Structures 2007-2009,
Solicitation No. 2007-201

DISTRICT(S) AFFECTED: City Wide

SUBJECT:

Discussion and action on the award of Solicitation No. 2007-201 for the Construction of Citywide Repair/Construction of Parkway Structures 2007-2009 to J.A.R. Concrete, Inc. of El Paso, Texas for an estimated total amount of \$3,349,695.00

It is requested that the City Manager of the City of El Paso be authorized to sign any contracts or other documents required to effectuate this award and be authorized to exercise on behalf of the City any extensions of the contract.

Work under this unit price contract is only an estimated value and will be ordered, performed, invoiced, and paid by measured quantity. The actual cost of this contract will be the sum total of unit prices at the end of the contract term.

As part of the award of this contract, the Director of Streets Department may, without further authorization from City Council, approve contract changes which are necessary for proper construction of the work and carrying out the intent of the design, which are in accordance with applicable law and which do not make changes to the unit price and which are within the appropriate budget.

This is Requirements Type, low bid, unit-price contract. The Financial Services and Street Departments recommend award as indicated to the lowest responsive, responsible bidder.

This is a Two (2) Year Requirements type contract where the contractor offers to the City of El Paso the option of extending the contract for either a Twelve (12) month or Twenty Four (24) months additional term by giving the contractor a written notice to extend not later than Thirty (30) days prior to the expiration of the original contract term.

BACKGROUND / DISCUSSION:

The City Streets Department in its continuous effort to upgrade the quality of life of its citizens, strives for a consistent maintenance approach to provide for well maintained, uniformly surfaced quality parkway structures. The Citywide Repair/Construction of Parkway Structures 2007-2009 project is one of the major components of the City's Parkways maintenance and construction program. The solicitation for bids for this project is based on a Requirements type Unit-Priced contract that is awarded on the basis of the lowest total amount bid for all the items in the solicitation proposal. J.A.R. Concrete, Inc. submitted the lowest responsive and responsible bid, additionally, J.A.R. Concrete is offering the City the option to extend the contract beyond the original contract term for an additional term of either Twelve (12) or Twenty Four (24) months. The purpose of this agenda item is to award this project to J.A.R. Concrete, Inc. the lowest responsive and responsible bidder. The approximate total value of this project is estimated at \$3,349,695.00. Two contractors submitted bids for this solicitation.

PRIOR COUNCIL ACTION:

N/A

AMOUNT AND SOURCE OF FUNDING:

Funding for this award is available as follows:


Project	Funding Source	Fund	Department	Account	Amount
	General Fund	01101	32010200	502227	\$1,000,000.00
PCP06MF001A	FY 2006 C.O.'s	27263	99331117	508027	\$1,000,000.00
G7132CD0023	CDBG	07869	71150069	508027	\$1,014,000.00
G600466	TX-90-X619 5307 FY2005	11678	60600011	508027	\$ 335,695.00

BOARD / COMMISSION ACTION:

N/A

*****REQUIRED AUTHORIZATION*****

LEGAL: (if required) _____ **FINANCE:** (if required) _____

DEPARTMENT HEAD:  _____

Cc: Patricia D. Adauto, Deputy City Manager Development and Infrastructure Services Manager

APPROVED FOR AGENDA:

CITY MANAGER: _____

DATE: _____

CONSTRUCTION PROJECT FORM
Unit Price

DATE: July 30, 2007
PROJECT: Citywide Repair/Construction of Parkway Structures
SOLICITATION NO: 2007-201
ACCOUNT NO(S): 993311117-PCP06MF001A-27263-508027
971150069-G7132CD0023-07869-508027
60600011-G600466-11678-508027
32010200-01101-502227
FUNDING SOURCE: Street Maintenance, ADA Projects, CDBG and Sun Metro Capital Projects
DEPARTMENT: Streets, Engineering, Community Development and Sun Metro
DISTRICT(S): City Wide: (Districts 1 - 8)

AGENDA DATE: August 7, 2007
Lowest responsive and responsible bidder:
CONTRACTOR: J.A.R. Concrete, Inc.
ESTIMATED AMOUNT: \$ 3,349,695.00

RECOMMENDATION:

Discussion and action on the award of Solicitation No. 2007-201 for the Construction of Citywide Repair/Construction of Parkway Structures 2007-2009 to J.A.R. Concrete, Inc., for an estimated total amount of \$3,349,695.00.

It is requested that the City Manager of the City of El Paso be authorized to sign any contracts or other documents required to effectuate this award and be authorized to exercise on behalf of the City any extensions of the contract.

Work under this unit price contract is only an estimated value and will be ordered, performed, invoiced, and paid by measured quantity. The actual cost of this contract will be the sum total of unit prices at the end of the contract term.

As part of the award of this contract, the Director of Streets Department may, without further authorization from City Council, approve contract changes which are necessary for proper construction of the work and carrying out the intent of the design, which are in accordance with applicable law and which do not make changes to the unit price and which are within the appropriate budget.

This is a Requirements type, low bid, unit-price contract. The Financial Services, Engineering and Street Departments recommend award as indicated to the lowest responsive, responsible bidder.


This is a Two (2) Year Requirements type contract where the contractor offers to the City of El Paso the option of extending the contract for either a Twelve (12) month or Twenty Four (24) months additional term by giving the contractor a written notice not later than thirty (30) days prior to the expiration of the original contract term.

DESCRIPTION OR EXPLANATION:

Base Bid I \$ 2,581,425.00
Base Bid II \$ 768,270.00
TOTAL RECOMMENDED AWARD: \$ 3,349,695.00

TIME FOR COMPLETION: 730 Consecutive Calendar Days
LIQUIDATED DAMAGES: No Liquidated Damages, this is a requirements type contract.

APPROVED:


Terrence Freiburg,
Purchasing Manager

07 JUL 30 PM 2:48
CITY CLERK DEPT.

JOHN COOK
MAYOR



CITY COUNCIL

ANN MORGAN LILLY, DISTRICT 1
SUSANNAH M. BYRD, DISTRICT 2
J. ALEXANDRO LOZANO, DISTRICT 3
MELINA CASTRO, DISTRICT 4
RACHEL QUINTANA, DISTRICT 5
EDDIE HOLGUIN, JR., DISTRICT 6
STEVE ORTEGA, DISTRICT 7
BETO O'ROURKE, DISTRICT 8

JOYCE WILSON
CITY MANAGER

DARYL W. COLE
STREETS DIRECTOR

STREET DEPARTMENT

July 25, 2007

TO: Terrence Freiburg, Deputy Director Financial Services

ATTN: Jaime Huerta, Contract Compliance Specialist

FROM: Daryl W. Cole, Streets Director

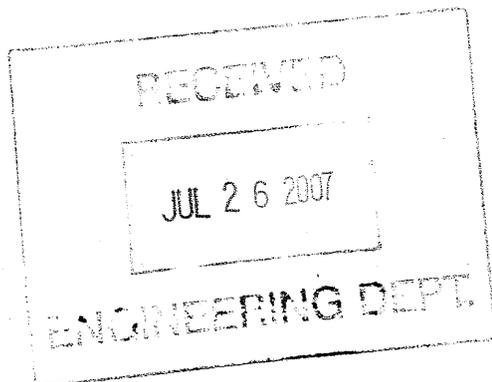
SUBJECT: **CITYWIDE REPAIR/CONSTRUCTION OF PARKWAY STRUCTURES
2007-2009, BID 2007-201**

We have reviewed the above-subject bid and we recommend that the contract be awarded to **J.A.R. Concrete, Inc.**, as the lowest, most responsive and responsible bidder meeting specifications. Total estimated contract award of **\$3,349,695.00**.

This is a two years requirements contract. Work under the unit price component is only an estimated value and will be ordered, performed, invoiced and paid by measured quantity. The actual cost of the unit price component will be the sum total of unit prices at the end of the contract term.

If you have any questions please call me at 621-6750.

DWC/en



07 JUL 30 PM 2:48
CITY CLERK DEPT.

City of El Paso

Scope of Work

Citywide Repair / Construction of Parkway Structures 2007-2009 Solicitation No. 2007-201

Base Bid I

This work will consist of the demolition, removal, and off-site proper disposal of concrete curb and gutter, concrete sidewalks, wheelchair ramps, median cuts, rock-walls and rock-wall concrete footings and foundations, rock rip rap, concrete slabs, concrete bus pads, and concrete channel lining, the displacement of wrought iron fencing, wrought iron gates, chain-link fencing, chain-link gates, and concrete footings and/or foundations. This work will include excavation and off-site proper disposal of generated debris, including subsoil. Also including, but not limited to, the removal and replacement as needed of miscellaneous improvements such as mailboxes, traffic signs, and utility boxes.

Parkway structure improvements shall consist of the repair, construction, replacement and/or reconstruction of concrete curb and gutter, concrete sidewalks, concrete reinforced driveways, concrete wheelchair ramps with detectable warnings, flumes, concrete medians, rip-rap, rock-walls, slabs and foundations, retaining walls, reinforced concrete slabs, concrete bus pads, and reinforced concrete channel linings, miscellaneous structures including manholes, drop inlets and barrier walls, the repair or replacement of wrought iron fencing and wrought iron gates, chain-link fencing, chain-link gates, and all necessary hardware to complete such work throughout the City of El Paso, Texas.

All construction work pertaining to pedestrian paths of travel, must meet the current Texas Department of Licensing and Regulation (TDLR) and Americans with Disabilities Act (ADA) requirements. Stamping of Contractor's logos is prohibited.

Base Bid II

Provide all labor, materials, equipment, traffic control in accordance with the latest Manual of Uniform Traffic Control Devices (MUTCD), and tools necessary for the installation of underground conduit, ground boxes, concrete foundations, and loop detectors at various locations citywide.

Notes :

The contractor **shall respond** to a request for a cost proposal within two (2) working days of such request. A separate Notice to Proceed will be issued for each job locality and shall indicate a completion date for that work. Liquidated damages apply to each job locality and associated Notice to Proceed.

6/04/2007
2:48
CITY CLERK DEPT.

Contractor shall provide Performance and Payment bonds for 100% value of the total estimated amount of award contract amount. The cost of these bonds will be distributed throughout the line items.

The estimated quantities indicated in the proposal are only estimated quantities. The estimated quantities do not guarantee the quantity of work for the Contractor; rather, the actual quantity of work shall be dependent on the total of all purchase orders issued to the Contractor at the sole discretion of the City. The actual quantity of work may vary from the estimated quantities herein.

This is a Unit Price Requirements Contract .

07 JUL 30 PM 2:48
CITY CLERK DEPT
6/04/2007

CITY OF EL PASO BID TABULATION

BID TITLE: CITYWIDE REPAIR / CONSTRUCTION OF PARKWAY STRUCTURES 2007-2009
 BID DATE: JULY 11, 2007

BID NO: 2007-201
 DEPARTMENT: STREETS

				C & C ROAD CONSTRUCTION, INC. EL PASO, TEXAS		J. A. R. CONCRETE, INC. EL PASO, TEXAS					
ITEM #	EST. QTY	UNITS	DESCRIPTION	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL
BASE BID 1 - UNIT PRICE SCHEDULE											
1	400,000	S.F.	4-inch sidewalk (placement) includes saw-cuts excavation preparation and compaction of subgrade, concrete placement compacted backfill, HMAC patching, site restoration, cleanup and proper disposal of all waste materials, Reference Details 1 & 2 for the sum of	\$2.00	\$800,000.00	\$1.20	\$480,000.00		\$0.00		\$0.00
2	45,000	S.F.	4-inch Sidewalk (replacement) includes saw-cuts, removal of existing structures excavation, preparation and compaction of subgrade, concrete placement, compacted backfill, HMAC patching, site restoration, cleanup and proper disposal of all waste materials Reference Details 1 and 2 for the sum of	\$3.00	\$135,000.00	\$5.00	\$225,000.00		\$0.00		\$0.00
3	500	S.F.	4-inch Sidewalk reinforced/ 6-inch non-reinforced (placement) includes saw cuts, removal of existing structures, excavation preparation and compaction of subgrade, concrete placement, compacted backfill, HMAC patching, site restoration, cleanup and proper disposal of all waste materials.	\$3.25	\$1,625.00	\$5.00	\$2,500.00		\$0.00		\$0.00

CITY CLERK DEPT.
07 JUL 30 PM 2:48

APPROVED BY: *MWP*

CITY OF EL PASO BID TABULATION

BID TITLE: CITYWIDE REPAIR / CONSTRUCTION OF PARKWAY STRUCTURES 2007-2009
 BID DATE: JULY 11, 2007

BID NO: 2007-201
 DEPARTMENT: STREETS

				C & C ROAD CONSTRUCTION, INC. EL PASO, TEXAS		J. A. R. CONCRETE, INC. EL PASO, TEXAS					
ITEM #	EST. QTY	UNITS	DESCRIPTION	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL
4	500	S.F.	4-inch sidewalk reinforced / 6-inch non-reinforced (replacement) includes saw cuts, removal of existing structures, excavation, preparation and compaction of subgrade, concrete placement compacted backfill, HMAC patching, site restoration, cleanup and proper disposal of all waste materials	\$4.20	\$2,100.00	\$6.00	\$3,000.00		\$0.00		\$0.00
5	15,000	S.F.	6-inch Concrete stem-walls (placement) to include saw-cuts excavation, preparation and compaction of subgrade, concrete placement, compacted backfill, site restoration, cleanup and proper disposal of all waste materials, Reference Detail 3, for the sum of	\$6.50	\$97,500.00	\$7.00	\$105,000.00		\$0.00		\$0.00
6	2,000	S.F.	6-Inch Concrete stem-walls (replacement) includes removal of existing structure saw-cuts, excavation preparation and compaction of subgrade, concrete placement compacted backfill, site restoration cleanup and proper disposal of all waste materials Reference Detail 3, for the sum of	\$7.25	\$14,500.00	\$8.00	\$16,000.00		\$0.00		\$0.00

CITY CLERK DEPT.
 07 JUL 30 PM 2:48

APPROVED BY *MMP*

CITY OF EL PASO BID TABULATION

BID TITLE: CITYWIDE REPAIR / CONSTRUCTION OF PARKWAY STRUCTURES 2007-2009
 BID DATE: JULY 11, 2007

BID NO: 2007-201
 DEPARTMENT: STREETS

				C & C ROAD CONSTRUCTION, INC. EL PASO, TEXAS		J. A. R. CONCRETE, INC. EL PASO, TEXAS					
ITEM #	EST. QTY	UNITS	DESCRIPTION	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL
7	5,200	L.F.	Curb and gutter (placement) includes saw-cut,excavation preparation and compaction of subgrade,concrete placement,compacted backfill site restoration,HMAC patching backfill,cleanup, and proper disposal of waste material. Reference Details 1 & 2 for the sum of	\$9.00	\$46,800.00	\$6.00	\$31,200.00		\$0.00		\$0.00
8	3,400	L.F.	Curb and gutter (replacement) includes saw-cuts, removal of existing structures, excavation preparation and compaction of subgrade,concrete placement compacted backfill, site restoration, HMAC patching cleanup and proper disposal of all waste materials. Reference Details 1 & 2 for the sum of	\$12.00	\$40,800.00	\$20.00	\$68,000.00		\$0.00		\$0.00
9	1,250	L.F.	Header curb for expansive soil (placement) includes saw-cuts, excavation,preparation and compaction of subgrade, concrete placement, compacted backfill, site restoration, HMAC patching,cleanup and proper disposal of all waste materials. Reference Detail 4, for the sum of	\$9.00	\$11,250.00	\$6.00	\$7,500.00		\$0.00		\$0.00

CITY CLERK DEPT.
 JUL 30 PM 2:48

APPROVED BY: *mm*

CITY OF EL PASO BID TABULATION

BID TITLE: CITYWIDE REPAIR / CONSTRUCTION OF PARKWAY STRUCTURES 2007-2009
 BID DATE: JULY 11, 2007

BID NO: 2007-201
 DEPARTMENT: STREETS

				C & C ROAD CONSTRUCTION, INC. EL PASO, TEXAS		J. A. R. CONCRETE, INC. EL PASO, TEXAS					
ITEM #	EST. QTY	UNITS	DESCRIPTION	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL
10	1,250	L.F.	Header curb for expansive soil (replacement) includes saw-cuts, removal of existing structures excavation preparation and compaction of subgrade, concrete placement, compacted backfill, site restoration, HMAC patching cleanup and proper disposal of all waste materials. Reference Detail 4, for the sum of	\$13.00	\$16,250.00	\$5.00	\$6,250.00		\$0.00		\$0.00
11	2,500	L.F.	Standard Curb (placement) includes saw-cuts, excavation preparation and compaction of subgrade, concrete placement compacted backfill site restoration, HMAC patching cleanup and proper disposal of all waste materials. Reference Details 1 & 2 for the sum of	\$5.00	\$12,500.00	\$5.00	\$12,500.00		\$0.00		\$0.00
12	1,750	L.F.	Standard Curb (replacemnt) includes saw-cuts, removal of existing structures excavation preparation and compaction of subgrade, concrete placement, compacted backfill site restoration HMAC Patching, cleanup and proper disposal of all waste materials Reference Details 1 & 2 for the sum of	\$8.50	\$14,875.00	\$21.00	\$36,750.00		\$0.00		\$0.00

CITY CLERK DEPT.
 JUL 30 PM 2:48

APPROVED BY: *map*

CITY OF EL PASO BID TABULATION

BID TITLE: CITYWIDE REPAIR / CONSTRUCTION OF PARKWAY STRUCTURES 2007-2009
 BID DATE: JULY 11, 2007

BID NO: 2007-201
 DEPARTMENT: STREETS

				C & C ROAD CONSTRUCTION, INC. EL PASO, TEXAS		J. A. R. CONCRETE, INC. EL PASO, TEXAS					
ITEM #	EST. QTY	UNITS	DESCRIPTION	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL
13	250	L.F.	TxDOT Pinned Curb (placement) includes saw-cuts, excavation, preparation and compaction of subgrade, concrete placement, compacted backfill, site restoration, HMAC patching, cleanup and proper disposal of all waste materials, Reference Detail 5 for the sum of	\$6.00	\$1,500.00	\$9.00	\$2,250.00		\$0.00		\$0.00
14	200	L.F.	TxDot Pinned Curb (replacement) includes saw-cuts, excavation preparation and compaction of subgrade, concrete placement, compacted backfill, site restoration, HMAC patching, cleanup and proper disposal of all waste materials Reference Detail 5 for the sum of	\$8.00	\$1,600.00	\$14.00	\$2,800.00		\$0.00		\$0.00
15	500	L.F.	6-Inch Rolled curb (placement) includes saw-cuts, excavation, preparation and compaction of subgrade, concrete placement, compacted backfill, site restoration, HMAC patching, cleanup and proper disposal of all waste materials Reference Detail 6 for the sum of	\$6.00	\$3,000.00	\$6.00	\$3,000.00		\$0.00		\$0.00

CITY CLERK DEPT.
 67 JUL 30 PM 2:49

APPROVED BY: *mmp*

CITY OF EL PASO BID TABULATION

BID TITLE: CITYWIDE REPAIR / CONSTRUCTION OF PARKWAY STRUCTURES 2007-2009
 BID DATE: JULY 11, 2007

BID NO: 2007-201
 DEPARTMENT: STREETS

				C & C ROAD CONSTRUCTION, INC. EL PASO, TEXAS		J. A. R. CONCRETE, INC. EL PASO, TEXAS					
ITEM #	EST. QTY	UNITS	DESCRIPTION	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL
16	250	LF	6 Inch Rolled curb (replacement) includes saw-cuts, removal of existing structures excavation,preparation and compaction of subgrade, concrete placement,compacted backfill, site restoration, HMAC Patching,cleanup and proper disposal of all waste materials. Reference Detail 6 for the sum of	\$14.00	\$3,500.00	\$8.00	\$2,000.00		\$0.00		\$0.00
17	5,250	S.F.	4-Inch Reinforced / 6-inch Non-Reinforced Concrete Residential Driveway (placement) includes saw-cuts, removal of existing structures excavation preparation and compaction of subgrade, concrete placement,compacted backfill, site restoration, HMAC patching, cleanup and proper disposal of all waste materials. Reference Detail 7, for the sum of	\$5.50	\$28,875.00	\$3.50	\$18,375.00		\$0.00		\$0.00
18	5,250	S.F.	4-inch Reinforced Concrete 6-inch Non-Reinforced Concrete Residential Driveway (replacement) includes saw-cuts, removal of existing structures excavation preparation and compaction of subgrade concrete placement,compacted backfill, site restoration,HMAC patching,cleanup and proper disposal of all waste materials Reference Detail 7, for the sum of	\$5.50	\$28,875.00	\$4.50	\$23,625.00		\$0.00		\$0.00

CITY CLERK DEPT
 6449
 07 JUL 30 PM 2:49

APPROVED BY: *MMP*

CITY OF EL PASO BID TABULATION

BID TITLE: CITYWIDE REPAIR / CONSTRUCTION OF PARKWAY STRUCTURES 2007-2009
 BID DATE: JULY 11, 2007

BID NO: 2007-201
 DEPARTMENT: STREETS

				C & C ROAD CONSTRUCTION, INC. EL PASO, TEXAS		J. A. R. CONCRETE, INC. EL PASO, TEXAS					
ITEM #	EST. QTY	UNITS	DESCRIPTION	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL
19	7,500	S.F.	6-Inch Concrete Commerical Driveway (placement) includes saw-cuts,removal of existing structures excavation preparation and compaction of subgrade,reinforced concrete placement,compacted backfill, site restoration, HMAC patching,cleanup and proper disposal of all waste materials. Reference Detail 7 for the sum of	\$5.00	\$37,500.00	\$3.00	\$22,500.00		\$0.00		\$0.00
20	7,500	S.F.	6-Inch Concrete Commerical Driveway (replacement) includes saw-cuts,removal of existing structures excavation,preparation and compaction of subgrade, reinforced concrete placement compacted backfill, site restoration, HMAC Patching cleanup and proper disposal of all waste materials. Reference Detail 7,for the sum of	\$7.00	\$52,500.00	\$6.00	\$45,000.00		\$0.00		\$0.00
21	16,500	S.F.	Wheelchair Ramp / Curb Cut (placement), includes saw-cuts removal of existing structures excavation,preparation and 95% compaction of subgrade concrete placement compacted backfill,site restoration, HMAC patching,cleanup and proper disposal of all waste materials, Finished product must meet current TDLR and ADA requirements Reference Section 0264 and Detail 7, for the sum of	\$12.00	\$198,000.00	\$6.00	\$99,000.00		\$0.00		\$0.00

CITY CLERK DEPT.
 07 JUL 30 PM 2:19

APPROVED BY: *MMP*

CITY OF EL PASO BID TABULATION

BID TITLE: CITYWIDE REPAIR / CONSTRUCTION OF PARKWAY STRUCTURES 2007-2009
 BID DATE: JULY 11, 2007

BID NO: 2007-201
 DEPARTMENT: STREETS

				C & C ROAD CONSTRUCTION, INC. EL PASO, TEXAS		J. A. R. CONCRETE, INC. EL PASO, TEXAS					
ITEM #	EST. QTY	UNITS	DESCRIPTION	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL
22	45,000	S.F.	Wheelchair Ramp / Curb Cut (replacement)includes saw-cuts,removal of existing structures,excavation, preparation and 95% compaction of subgrade, concrete placement compacted backfill, site restoration,HMAC patching cleanup and proper disposal of all waste materials.Finished product must meet current TDLR and ADA requirements. Reference Section 0264 and Detail 7, for the sum of	\$11.00	\$495,000.00	\$10.00	\$450,000.00		\$0.00		\$0.00
23	6,000	S.F.	Cast in place ADA tile (placement) includes installation, preparation, cleanup and proper disposal of all waste materials.Finished must meet current TDLR & ADA requirements, for the sum of	\$21.00	\$126,000.00	\$22.00	\$132,000.00		\$0.00		\$0.00
24	1,000	S.F.	Surface mount ADA tile placement includes installation, preparation, cleanup and proper disposal of all waste materials.Finished product must meet current TDLR and ADA requirements. for the sum of	\$30.00	\$30,000.00	\$23.50	\$23,500.00		\$0.00		\$0.00

APPROVED BY *MWD*

J.V. CLERK DEPT.
 07 JUN 08 PM 2:49

CITY OF EL PASO BID TABULATION

BID TITLE: CITYWIDE REPAIR / CONSTRUCTION OF PARKWAY STRUCTURES 2007-2009
 BID DATE: JULY 11, 2007

BID NO: 2007-201
 DEPARTMENT: STREETS

				C & C ROAD CONSTRUCTION, INC. EL PASO, TEXAS		J. A. R. CONCRETE, INC. EL PASO, TEXAS					
ITEM #	EST. QTY	UNITS	DESCRIPTION	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL
25	250	S.F.	Wheelchair Ramp / Curb Cut with concrete pavers placement includes saw-cuts,removal of existing structures, excavation,preparation and 95% compaction of subgrade concrete placement compacted backfill, site restoration HMAC patching, cleanup and proper disposal of all waste materials Finished product must meet current TDLR and ADA requirements. Reference Section 0264 and Detail 7,for the sum of	\$15.00	\$3,750.00	\$10.00	\$2,500.00		\$0.00		\$0.00
26	250	S.F.	Wheelchair Ramp / Curb Cut with concrete pavers replacement includes saw-cuts, removal of existing structures, excavation,preparation and 95% compaction of subgrade concrete placement compacted backfill, site restoration HMAC patching, cleanup and proper disposal of all waste materials Finished product must meet current TDLR and ADA requirements. Reference Section 0264 and Detail 7,for the sum of	\$17.00	\$4,250.00	\$13.00	\$3,250.00		\$0.00		\$0.00
27	4,000	S.F.	Median Ramp/Cut (placement) includes saw-cuts, removal of existing structures, excavation,preparation and 95% compaction of subgrade concrete placement compacted backfill,site restoration HMAC patching,cleanup and proper disposal of all waste materials	\$14.00	\$56,000.00	\$6.00	\$24,000.00		\$0.00		\$0.00

CITY CLERK DEPT
 07 JUL 30 PM 2:49

APPROVED BY: *MWP*

CITY OF EL PASO BID TABULATION

BID TITLE: CITYWIDE REPAIR / CONSTRUCTION OF PARKWAY STRUCTURES 2007-2009
 BID DATE: JULY 11, 2007

BID NO: 2007-201
 DEPARTMENT: STREETS

				C & C ROAD CONSTRUCTION, INC. EL PASO, TEXAS		J. A. R. CONCRETE, INC. EL PASO, TEXAS					
ITEM #	EST. QTY	UNITS	DESCRIPTION	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL
28	1,000	S.F.	Median Ramp/Cut (replacement) includes saw-cuts, removal of existing structures, excavation, preparation and 95% compaction of subgrade concrete placement compacted backfill, site restoration HMAC patching, cleanup and proper disposal of all waste materials Finished product must meet current TDLR and ADA requirements. Reference Section 0264, for the sum of	\$14.00	\$14,000.00	\$7.00	\$7,000.00		\$0.00		\$0.00
29	1,600	S.F.	Drainage Flume (placement) includes saw-cuts, removal of existing structures, excavation preparation and compaction of subgrade, reinforced concrete placement compacted backfill site restoration, HMAC patching, cleanup and proper disposal of all waste materials Reference Details 8 & 9 for the sum of	\$10.00	\$16,000.00	\$8.00	\$12,800.00		\$0.00		\$0.00
30	1,600	S.F.	Drainage Flume (replacement) includes saw-cuts, removal of existing structures, excavation, preparation and compaction of subgrade, reinforced concrete placement compacted backfill, site restoration, HMAC patching cleanup and proper disposal of all waste materials. Reference Details 8 and 9, for the sum of	\$12.00	\$19,200.00	\$9.00	\$14,400.00		\$0.00		\$0.00

CITY CLERK DEPT.
 07 JUL 30 PM 2:49

APPROVED BY: *MMP*

CITY OF EL PASO BID TABULATION

BID TITLE: CITYWIDE REPAIR / CONSTRUCTION OF PARKWAY STRUCTURES 2007-2009
 BID DATE: JULY 11, 2007

BID NO: 2007-201
 DEPARTMENT: STREETS

				C & C ROAD CONSTRUCTION, INC. EL PASO, TEXAS		J. A. R. CONCRETE, INC. EL PASO, TEXAS					
ITEM #	EST. QTY	UNITS	DESCRIPTION	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL
31	900	Perch	Rockwall (placement) includes excavation, preparation and compaction of foundation subgrade, reinforced concrete footing placement, wall construction, site restoration compacted backfill, cleanup and proper disposal of all waste materials. Perch paid on rock volume basis. Reference Detail 10, for the of	\$100.00	\$90,000.00	\$65.00	\$58,500.00		\$0.00		\$0.00
32	300	perch	Rockwall (replacement) includes demolition, excavation preparation and compaction of foundation subgrade, reinforced concrete footing placement, wall construction site restoration, compacted backfill, cleanup and proper disposal of all waste materials Perch paid on rock volume basis. Reference Detail 10, for the sum of	\$125.00	\$37,500.00	\$67.00	\$20,100.00		\$0.00		\$0.00
33	400	perch	Retaining Rockwall placement includes excavation preparation and compaction of foundation subgrade, reinforced concrete footing placement, wall construction site restoration, compacted backfill, cleanup and proper disposal of all waste materials Perch paid on rock volume basis. Reference Detail 11, for the sum of	\$125.00	\$50,000.00	\$91.00	\$36,400.00		\$0.00		\$0.00

CITY CLERK DEPT.
 07 JUL 30 PM 2:49

APPROVED BY: *map*

CITY OF EL PASO BID TABULATION

BID TITLE: CITYWIDE REPAIR / CONSTRUCTION OF PARKWAY STRUCTURES 2007-2009
 BID DATE: JULY 11, 2007

BID NO: 2007-201
 DEPARTMENT: STREETS

				C & C ROAD CONSTRUCTION, INC. EL PASO, TEXAS		J. A. R. CONCRETE, INC. EL PASO, TEXAS					
ITEM #	EST. QTY	UNITS	DESCRIPTION	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL
34	250	Perch	Retaining Rockwall (replacement) includes demolition excavation,preparation and compaction of foundation subgrade,reinforced concrete footing placement,wall construction, site restoration compacted backfill,cleanup and proper disposal of all waste materials.Perch paid on rock volume basis.Reference Detail 11, for the sum of	\$110.00	\$27,500.00	\$71.00	\$17,750.00		\$0.00		\$0.00
35	100	Perch	Red Rockwall (placement) includes excavation,preparation and compaction of foundation subgrade,reinforced concrete footing placement,Franklin Red Rock wall construction site restoration,compacted backfill cleanup and proper disposal of all waste materials.Perch paid on rock volume basis, Reference Detail 10, for the sum of	\$170.00	\$17,000.00	\$170.00	\$17,000.00		\$0.00		\$0.00
36	100	perch	Red Rockwall (replacement) includes demolition,excavation, preparation and compaction of foundation subgrade, reinforced concrete footing placement, Franklin Red Rock wall construction,site restoration,compacted backfill cleanup and proper disposal of all waste materials.Perch paid on rock volume basis, Reference Detail 10, for the sum of	\$180.00	\$18,000.00	\$170.00	\$17,000.00		\$0.00		\$0.00

07 JUL 30 PM 2:49
 CITY CLERK DEPT.

APPROVED BY: *MUP*

CITY OF EL PASO BID TABULATION

BID TITLE: CITYWIDE REPAIR / CONSTRUCTION OF PARKWAY STRUCTURES 2007-2009
 BID DATE: JULY 11, 2007

BID NO: 2007-201
 DEPARTMENT: STREETS

				C & C ROAD CONSTRUCTION, INC. EL PASO, TEXAS		J. A. R. CONCRETE, INC. EL PASO, TEXAS					
ITEM #	EST. QTY	UNITS	DESCRIPTION	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL
37	2,500	S.F.	Rockwall re-pointing to include preparation and cleaning of existing joints, re-pointing with color matched Portland cement mortar (2,500 psi) site restoration cleanup and proper disposal of all waste materials; for the sum of	\$3.75	\$9,375.00	\$3.00	\$7,500.00		\$0.00		\$0.00
38	1,800	S.F.	Rock Rip Rap (placement) includes excavation preparation and compaction of subgrade placement of reinforced concrete footing and rock rip rap elements, site restoration compacted backfill, cleanup and proper disposal of waste material Measured on a Perch Basis Reference Detail 12, for the sum of	\$6.00	\$10,800.00	\$4.00	\$7,200.00		\$0.00		\$0.00
39	850	S.F.	Rock Rip Rap (replacement) includes excavation, preparation and compaction of subgrade, placement of reinforced concrete footing and rock rip rap elements, site restoration wall construction, site restoration, compacted backfill cleanup and proper disposal of waste materials. Measured on a Perch Basis. Reference Detail 12, for the sum of	\$7.00	\$5,950.00	\$4.00	\$3,400.00		\$0.00		\$0.00

CITY CLERK DEPT.
07 JUL 30 PM 2:49

APPROVED BY: *MMP*

CITY OF EL PASO BID TABULATION

BID TITLE: CITYWIDE REPAIR / CONSTRUCTION OF PARKWAY STRUCTURES 2007-2009
 BID DATE: JULY 11, 2007

BID NO: 2007-201
 DEPARTMENT: STREETS

				C & C ROAD CONSTRUCTION, INC. EL PASO, TEXAS		J. A. R. CONCRETE, INC. EL PASO, TEXAS					
ITEM #	EST. QTY	UNITS	DESCRIPTION	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL
40	20	perch	Rockwall columns (placement) includes excavation preparation and compaction of foundation subgrade,placement of reinforced concrete footing and rock column elements, site restoration,compacted backfill cleanup and proper disposal of waste materials.Measured on a Perch Basis Reference Column Detail 13, for the sum of	\$300.00	\$6,000.00	\$175.00	\$3,500.00		\$0.00		\$0.00
41	20	perch	Rockwall columns(replacement) includes demolition excavation preparatoin and compaction of foundation subgrade,placemnt of reinforced concrete footing and rock column elements,site restoration compacted backfill cleanup and proper disposal of waste materials.Measured on a Perch Basis.Reference Column Detail 13, for the sum of	\$350.00	\$7,000.00	\$175.00	\$3,500.00		\$0.00		\$0.00
42	1,000	S.Y.	4-Inch reinforced Concrete Slab (placement) includes saw-cuts,removal of existing structures excavation,preparation and compaction of subgrade reinforced concrete placement compacted backfill,site restoration cleanup and proper disposal of all waste materials,Reference Detail 14 for the sum of	\$25.00	\$25,000.00	\$12.00	\$12,000.00		\$0.00		\$0.00

CITY CLERK DEPT.
 07 JUL 30 PM 2:49

APPROVED BY: *mwp*

CITY OF EL PASO BID TABULATION

BID TITLE: CITYWIDE REPAIR / CONSTRUCTION OF PARKWAY STRUCTURES 2007-2009
 BID DATE: JULY 11, 2007

BID NO: 2007-201
 DEPARTMENT: STREETS

				C & C ROAD CONSTRUCTION, INC. EL PASO, TEXAS		J. A. R. CONCRETE, INC. EL PASO, TEXAS					
ITEM #	EST. QTY	UNITS	DESCRIPTION	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL
43	500	S.Y.	6-Inch reinforced Concrete Slab (placement) includes saw-cuts,removal of existing structures,excavation,preparation and compaction of subgrade, reinforced concrete placement compacted backfill site restoration cleanup and proper disposal of all waste materials. Reference Detail 14, for the sum of	\$36.00	\$18,000.00	\$15.00	\$7,500.00		\$0.00		\$0.00
44	100	CY	Reinforced footing for concrete slab (placement) includes saw-cuts, removal of existing structures, excavation preparation and compaction of subgrade reinforced concrete placement compacted backfill,site restoration, cleanup and proper disposal of all waste materials.Reference Detail 14, for the sum of	\$300.00	\$30,000.00	\$350.00	\$35,000.00		\$0.00		\$0.00
45	4	EACH	Concrete bus pad w/ approach concrete pad (placement) to include saw-cuts,removal of existing structures excavation preparation and compaction of subgrade reinforced concrete placement,compacted backfill, HMAc paving site restoration cleanup and proper disposal of all waste materials Reference Detail 15 and 16, for the sum of	\$12,000.00	\$48,000.00	\$7,000.00	\$28,000.00		\$0.00		\$0.00

CITY CLERK DEPT.
07 JUL 30 PM 2:49

APPROVED BY: *MWP*

CITY OF EL PASO BID TABULATION

BID TITLE: CITYWIDE REPAIR / CONSTRUCTION OF PARKWAY STRUCTURES 2007-2009
 BID DATE: JULY 11, 2007

BID NO: 2007-201
 DEPARTMENT: STREETS

				C & C ROAD CONSTRUCTION, INC. EL PASO, TEXAS		J. A. R. CONCRETE, INC. EL PASO, TEXAS					
ITEM #	EST. QTY	UNITS	DESCRIPTION	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL
46	100	S.Y.	8-inch Concrete paving (placement) to include saw-cuts, removal of existing structures, excavation preparation and compaction of subgrade, reinforced concrete placement, compacted backfill, restoration cleanup and proper disposal of all waste materials Reference Detail 17, for the sum of	\$80.00	\$8,000.00	\$70.00	\$7,000.00		\$0.00		\$0.00
47	100	S.Y.	8-inch Concrete paving (replacement) to include saw-cuts, removal of existing structures, excavation preparation and compaction of subgrade reinforced concrete placement compacted backfill, site restoration, cleanup and proper disposal of all waste materials. Reference Detail 17, for the sum of	\$85.00	\$8,500.00	\$90.00	\$9,000.00		\$0.00		\$0.00
48	100	S.Y.	10-inch Concrete paving (placement) to include saw-cuts, removal of existing structures excavation preparation and compaction of subgrade reinforced concrete placement, compacted backfill, restoration, cleanup and proper disposal of all waste materials Reference Detail 17, for the sum of	\$90.00	\$9,000.00	\$77.00	\$7,700.00		\$0.00		\$0.00

07 JUL 30 PM 2:49
 CITY CLERK DEPT.

APPROVED BY: *mmp*

CITY OF EL PASO BID TABULATION

BID TITLE: CITYWIDE REPAIR / CONSTRUCTION OF PARKWAY STRUCTURES 2007-2009
 BID DATE: JULY 11, 2007

BID NO: 2007-201
 DEPARTMENT: STREETS

				C & C ROAD CONSTRUCTION, INC. EL PASO, TEXAS		J. A. R. CONCRETE, INC. EL PASO, TEXAS					
ITEM #	EST. QTY	UNITS	DESCRIPTION	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL
49	100	S.Y.	8-inch Concrete paving (replacement)to include saw-cuts,removal of existing structures, excavation preparation and compaction of subgrade,reinforced concrete placement,compacted backfill, restoration cleanup and proper disposal of all waste materials Reference Detail 17, for the sum of	\$95.00	\$9,500.00	\$92.00	\$9,200.00		\$0.00		\$0.00
50	100	S.Y.	12-inch Concrete paving (placement) to include saw-cuts,removal of existing structures,excavation preparation and compaction of subgrade reinforced concrete placement compacted backfill,restoration cleanup and proper disposal of all waste materials,Reference Detail 17, for the sum of	\$100.00	\$10,000.00	\$85.00	\$8,500.00		\$0.00		\$0.00
51	100	S.Y.	12-inch Concrete paving (replacement) to include saw-cuts,removal of existing structures excavation preparation and compaction of subgrade reinforced concrete placement,compacted backfill, restoration,cleanup and proper disposal of all waste materials Reference Detail 17, for the sum of	\$110.00	\$11,000.00	\$99.00	\$9,900.00		\$0.00		\$0.00

CITY CLERK DEPT.
 07 JUL 30 PM 2:49

APPROVED BY: *mwp*

CITY OF EL PASO BID TABULATION

BID TITLE: CITYWIDE REPAIR / CONSTRUCTION OF PARKWAY STRUCTURES 2007-2009
 BID DATE: JULY 11, 2007

BID NO: 2007-201
 DEPARTMENT: STREETS

				C & C ROAD CONSTRUCTION, INC. EL PASO, TEXAS		J. A. R. CONCRETE, INC. EL PASO, TEXAS					
ITEM #	EST. QTY	UNITS	DESCRIPTION	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL
52	10	C.Y.	Jersey Barrier,decorative fluted reinforced Concrete Structure (placement) includes saw-cuts removal of existing structures excavation preparation and compaction of subgrade required forming,reinforced concrete placement compacted backfill site restoration cleanup and proper disposal of all waste materials, for the sum of	\$500.00	\$5,000.00	\$500.00	\$5,000.00		\$0.00		\$0.00
53	10	C.Y.	Jersey Barrier,decorative fluted reinforced Concrete structure(replacement) includes demolition saw-cuts,removal of existing structures, excavation preparation and compaction of subgrade required forming,reinforced concrete placement compacted backfill site restoration cleanup and proper disposal of all waste materials for the sum of	\$600.00	\$6,000.00	\$700.00	\$7,000.00		\$0.00		\$0.00
54	20	C.Y.	Miscellaneous Reinforced Concrete Structure (drainage inlets and outlets,manholes, barrier walls) Repair (placement) includes saw-cuts,removal of existing structures excavation preparation and compaction of subgrade,required forming reinforced concrete placement compacted backfill, site restoration cleanup and proper disposal of all waste material for the sum of	\$260.00	\$5,200.00	\$350.00	\$7,000.00		\$0.00		\$0.00

APPROVED BY: *mwp*

CITY CLERK DEPT.
07 JUL 30 PM 2:49

CITY OF EL PASO BID TABULATION

BID TITLE: CITYWIDE REPAIR / CONSTRUCTION OF PARKWAY STRUCTURES 2007-2009
 BID DATE: JULY 11, 2007

BID NO: 2007-201
 DEPARTMENT: STREETS

				C & C ROAD CONSTRUCTION, INC. EL PASO, TEXAS		J. A. R. CONCRETE, INC. EL PASO, TEXAS					
ITEM #	EST. QTY	UNITS	DESCRIPTION	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL
55	60	C.Y.	Miscellaneous Reinforced Concrete Structure (drainage inlets and outlets, manholes, barrier walls) Repair (replacement) includes saw-cuts, demolition removal of existing structures excavation preparation and compaction of subgrade required forming, reinforced concrete placement compacted backfill site restoration cleanup and proper disposal of all waste materials for the sum of	\$280.00	\$16,800.00	\$250.00	\$15,000.00		\$0.00		\$0.00
56	4,000	C.Y.	Concrete channel lining (placement) to include saw-cuts, removal of existing structures, excavation, preparation and compaction of subgrade reinforced concrete placement compacted backfill, restoration cleanup and proper disposal of all waste materials Reference Details 18 to 20 for the sum of	\$38.00	\$152,000.00	\$10.00	\$40,000.00		\$0.00		\$0.00
57	1,275	S.Y.	Concrete Channel lining (replacement) to include saw-cuts, removal of existing structures excavation preparation and compaction of subgrade, reinforced concrete placement, compacted backfill restoration cleanup and proper disposal of all waste materials. Reference Details 18 to 20 for the sum of	\$46.00	\$58,650.00	\$12.00	\$15,300.00		\$0.00		\$0.00

APPROVED BY: *MWP*

07 JUL 20 PM 2:49
CITY CLERK DEPT.

CITY OF EL PASO BID TABULATION

BID TITLE: CITYWIDE REPAIR / CONSTRUCTION OF PARKWAY STRUCTURES 2007-2009
 BID DATE: JULY 11, 2007

BID NO: 2007-201
 DEPARTMENT: STREETS

				C & C ROAD CONSTRUCTION, INC. EL PASO, TEXAS		J. A. R. CONCRETE, INC. EL PASO, TEXAS					
ITEM #	EST. QTY	UNITS	DESCRIPTION	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL
58	100	C.Y.	8-inch Reinforced retaining concrete wall (placement) includes saw-cuts, removal of existing structures excavation preparatin and compaction of subgrade required forming, reinforced concrete placement compacted backfill site restoration cleanup and proper disposal of all waste materials Reference Detail 21 for the sum of	\$260.00	\$26,000.00	\$175.00	\$17,500.00		\$0.00		\$0.00
59	50	C.Y.	8-inch Reinforced retaining concrete wall (replacement) includes demolition saw-cuts removal of existing structures excavation preparation and compaction of subgrade required formng, reinforced concrete placement compacted backfill site restoration cleanup and proper disposal of all waste materials. Reference Detail 21, for the sum of	\$290.00	\$14,500.00	\$150.00	\$7,500.00		\$0.00		\$0.00
60	425	S.Y.	Add exposed aggregate texture finish using 3/4 - inch max river rock for the sum of	\$40.00	\$17,000.00	\$4.75	\$2,018.75		\$0.00		\$0.00
61	200	S.Y.	Add concrete integrated color tint, for the sum of	\$8.00	\$1,600.00	\$9.00	\$1,800.00		\$0.00		\$0.00

07 JUL 20 PM 2:49
 CITY CLERK DEPT.

APPROVED BY: *Mup*

CITY OF EL PASO BID TABULATION

BID TITLE: CITYWIDE REPAIR / CONSTRUCTION OF PARKWAY STRUCTURES 2007-2009 BID NO: 2007-201
 BID DATE: JULY 11, 2007 DEPARTMENT: STREETS

				C & C ROAD CONSTRUCTION, INC. EL PASO, TEXAS		J. A. R. CONCRETE, INC. EL PASO, TEXAS					
ITEM #	EST. QTY	UNITS	DESCRIPTION	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL
62	1,000	S.F.	Wrought iron gate,variable height (placement to include fabrication of wrought iron gate posts, posts and locking device, paint finish concrete footing placement site cleanup and proper disposal of all waste materials Reference Detail 22, for the sum of	\$12.00	\$12,000.00	\$7.50	\$7,500.00		\$0.00		\$0.00
63	500	S.F.	Wrought iron gate,variable height (replacement) to include removal of existing structures,fabrication of wrought iron gate,posts and locking device,paint finish, concrete footing placement site cleanup and proper dispose of all waste materials Reference Detail 22, for the sum of	\$14.00	\$7,000.00	\$8.50	\$4,250.00		\$0.00		\$0.00
64	1,275	S.F.	Wrought iron fencing, variable height (placement) to include fabrication of wrought iron gate, end and line posts paint finish, concrete footing placement, site cleanup and proper disposal of all waste materials Reference Detail 22 for the sum of	\$13.00	\$16,575.00	\$6.75	\$8,606.25		\$0.00		\$0.00

07 JUL 30 PM 2:49
CITY CLERK DEPT.

APPROVED BY: *MLW*

CITY OF EL PASO BID TABULATION

BID TITLE: CITYWIDE REPAIR / CONSTRUCTION OF PARKWAY STRUCTURES 2007-2009
 BID DATE: JULY 11, 2007

BID NO: 2007-201
 DEPARTMENT: STREETS

				C & C ROAD CONSTRUCTION, INC. EL PASO, TEXAS		J. A. R. CONCRETE, INC. EL PASO, TEXAS					
ITEM #	EST. QTY	UNITS	DESCRIPTION	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL
65	1,000	S.F.	Wrought iron fencing variable height (replacement) includes removal of existing structure to include fabrication of wrought iron gate, end and line posts, paint finish concrete footing placement site cleanup and proper disposal of all waste material Reference Detao; 22,for the sum of	\$15.00	\$15,000.00	\$9.00	\$9,000.00		\$0.00		\$0.00
66	500	S.F.	Chain-link fence,variable Height with 1 foot (3-strand) barbed wire extension above Chain-link fence (placement) to include all materials Chain-Link fence fabric, fence posts concrete footings, cleanup site restoration and proper disposal of all waste materials Item to be paid based on net area of installed metal fabric Reference Details 23 & 24 for the sum of	\$14.00	\$7,000.00	\$4.00	\$2,000.00		\$0.00		\$0.00
67	500	S.F.	Chain-link fence variable height, with 1-foot (3-strand) barbed wire extension above Chain-link fence (replacement) to include removal of damaged fence,fence posts and footings. Installation of new fence posts new concrete footings, new chain-link fence fabric all material cleanup site restoration and proper disposal of all waste materials, Item to be paid based on net area of installed metal fabric Reference Details 23 & 24 for the sum of	\$16.00	\$8,000.00	\$7.00	\$3,500.00		\$0.00		\$0.00

APPROVED BY: *mwp*

CITY CLERK DEPT.
07 JUL 30 PM 2:49

CITY OF EL PASO BID TABULATION

BID TITLE: CITYWIDE REPAIR / CONSTRUCTION OF PARKWAY STRUCTURES 2007-2009
 BID DATE: JULY 11, 2007

BID NO: 2007-201
 DEPARTMENT: STREETS

				C & C ROAD CONSTRUCTION, INC. EL PASO, TEXAS		J. A. R. CONCRETE, INC. EL PASO, TEXAS					
ITEM #	EST. QTY	UNITS	DESCRIPTION	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL
68	2,000	S.F.	Chain-link fence variable height (placement) to include all materials chain-link fence fabric,fence posts, concrete footings,cleanup site restoration and proper disposal of all waste material Item to be paid based on net area of installed metal fabric Reference Detail 23 and 24 for the sum of	\$10.60	\$21,200.00	\$4.00	\$8,000.00		\$0.00		\$0.00
69	2,000	S.F.	Chain-link fence,variable height (replacement) to include removal of damaged fence,fence posts and footings. Installation of new fence posts new concrete footings, new chain-link fence fabric all material cleanup site restoration and proper disposal of all waste materials, Item to be paid based on net area of installed metal fabric Reference Details 23 & 24 for the sum of	\$12.50	\$25,000.00	\$5.00	\$10,000.00		\$0.00		\$0.00
70	200	S.F.	Chain-link fence gate variable height, with 1-foot (3-strand) barbed wire extension above Chain-link fence (placement) to include all materials chain-link fence fabric,fence posts, concrete footings,cleanup site restoration and proper disposal of all waste materials. Item to be paid based on net area of installed metal fabric. Reference Details 23 & 24 for the sum of	\$20.00	\$4,000.00	\$7.50	\$1,500.00		\$0.00		\$0.00

CITY CLERK DEPT.
07 JUL 30 PM 2:49

APPROVED BY: *MWP*

CITY OF EL PASO BID TABULATION

BID TITLE: CITYWIDE REPAIR / CONSTRUCTION OF PARKWAY STRUCTURES 2007-2009
 BID DATE: JULY 11, 2007

BID NO: 2007-201
 DEPARTMENT: STREETS

				C & C ROAD CONSTRUCTION, INC. EL PASO, TEXAS		J. A. R. CONCRETE, INC. EL PASO, TEXAS					
ITEM #	EST. QTY	UNITS	DESCRIPTION	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL
71	200	S.F.	Chain-link gate,variable height with 1 foot (3-strand) barbed wire extension above chain-link fence replacement to include removal of damaged gate, gate posts and footings chain-link fence fabric,fence posts concrete footings, cleanup site restoration and proper disposal of all waste materials, Item to be paid based on net area of installed metal fabric Reference Details 23 & 24 for the sum of	\$24.00	\$4,800.00	\$8.50	\$1,700.00		\$0.00		\$0.00
72	200	S.F.	Chain-link fence,gate variable height, placement to include all materials chain-link fence fabric,fence posts, concrete footings,cleanup site restoration and proper disposal of all waste materials. Item to be paid based on net area of installed metal fabric. Reference Details 23 & 24 for the sum of	\$18.00	\$3,600.00	\$7.50	\$1,500.00		\$0.00		\$0.00
73	200	S.F.	Chain-link fence gate variable height replacement to include removal of damaged fence,fence posts and footings, Installation of new fence posts, new concrete footings, new chain-link fence fabric, all material clean-up site restoration and proper disposal of all waste materials Item to be paid based on net area of installed metal fabric. Reference Details 23 & 24 for the sum of	\$24.00	\$4,800.00	\$8.50	\$1,700.00		\$0.00		\$0.00

APPROVED BY: *MMP*

CITY CLERK DEPT.
07 JUL 30 PM 2:49

CITY OF EL PASO BID TABULATION

BID TITLE: CITYWIDE REPAIR / CONSTRUCTION OF PARKWAY STRUCTURES 2007-2009
 BID DATE: JULY 11, 2007

BID NO: 2007-201
 DEPARTMENT: STREETS

				C & C ROAD CONSTRUCTION, INC. EL PASO, TEXAS		J. A. R. CONCRETE, INC. EL PASO, TEXAS					
ITEM #	EST. QTY	UNITS	DESCRIPTION	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL
74	100	EACH	Parking Meter Pipe (placement) includes saw-cuts/coring,excavation concrete foundation match existing surface finish,site restoration cleanup and proper disposal of all waste materials. Reference detail 25, for the sum of	\$80.00	\$8,000.00	\$60.00	\$6,000.00		\$0.00		\$0.00
75	25	EACH	Parking Meter Pipe (replacement) includes removal of damaged parking meter pipe, saw-cuts/coring, excavation,concrete foundation match existing surface finish site restoration cleanup and proper disposal of all waste materials. Reference detail 25, for the sum of	\$90.00	\$2,250.00	\$150.00	\$3,750.00		\$0.00		\$0.00
76	100	EACH	Parking Meters Pipe Base Plate Mount (placement) includes installation of bolted plate, site restoration,cleanup and proper disposal of all waste materials.Reference Detail 25, for the sum of	\$180.00	\$18,000.00	\$59.00	\$5,900.00		\$0.00		\$0.00

APPROVED BY: *MMP*

CITY CLERK DEPT.
07 JUL 30 PM 2:50

CITY OF EL PASO BID TABULATION

BID TITLE: CITYWIDE REPAIR / CONSTRUCTION OF PARKWAY STRUCTURES 2007-2009
 BID DATE: JULY 11, 2007

BID NO: 2007-201
 DEPARTMENT: STREETS

				C & C ROAD CONSTRUCTION, INC. EL PASO, TEXAS		J. A. R. CONCRETE, INC. EL PASO, TEXAS					
ITEM #	EST. QTY	UNITS	DESCRIPTION	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL
77	25	EACH	Parking Meter Pipe Base Plate Mount (replacement) includes removal of damaged post, installation of bolted plate, site restoration, cleanup, and proper disposal of all waste materials. Reference detail 25, for the sum of	\$210.00	\$5,250.00	\$59.00	\$1,475.00		\$0.00		\$0.00
78	3,000	S.Y.	4-inch Stamped colored concrete (placement) Minimum of 3 stamp patterns color match adjacent concrete or as directed by inspector includes saw-cuts, excavation preparation and 95% compaction of subgrade, concrete placement, application of sealer, site restoration, cleanup and proper disposal of all waste materials. Reference Technical Specifications, Division III, Item 5326 for the sum of	\$31.00	\$93,000.00	\$24.00	\$72,000.00		\$0.00		\$0.00
79	2,000	S.Y.	4-inch Stamped colored concrete (replacement) Minimum of 3 stamp patterns color match adjacent concrete or as directed by inspector includes saw-cuts, excavation preparation and 95% compaction of subgrade, concrete placement, application of sealer, site restoration, cleanup and proper disposal of all waste materials. Reference Technical Specifications, Division III, Item 5326 for the sum of	\$40.00	\$80,000.00	\$20.00	\$40,000.00		\$0.00		\$0.00

APPROVED BY: *MWP*

CITY CLERK DEPT.
07 JUL 30 PM 2:50

CITY OF EL PASO BID TABULATION

BID TITLE: CITYWIDE REPAIR / CONSTRUCTION OF PARKWAY STRUCTURES 2007-2009
 BID DATE: JULY 11, 2007

BID NO: 2007-201
 DEPARTMENT: STREETS

				C & C ROAD CONSTRUCTION, INC. EL PASO, TEXAS		J. A. R. CONCRETE, INC. EL PASO, TEXAS					
ITEM #	EST. QTY	UNITS	DESCRIPTION	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL
80	200	S.Y.	6-inch reinforced Stamped colored concrete (placement) Minimum of 3 stamp patterns color match adjacent concrete or as directed by inspector includes saw-cuts,excavation preparation and 95% compaction of subgrade reinforced concrete placement application of sealer site restoration cleanup and proper disposal of all waste materials.Reference Technical Specifications Division III Item 5326, for the sum of	\$40.00	\$8,000.00	\$36.00	\$7,200.00		\$0.00		\$0.00
81	200	S.Y.	6-inch reinforced Stamped colored concrete (replacement) Minimum of 3 stamp patterns color match adjacent concrete or as directed by inspector includes saw-cuts, removal of existing structures,excavation preparation and 95% compaction of subgrade,reinforced concrete placement,application of sealer, site restoration, cleanup and proper disposal of all waste materials. Reference Technical Specifications, Division III, Item 5326 for the sum of	\$45.00	\$9,000.00	\$47.00	\$9,400.00		\$0.00		\$0.00
82	25	EACH	City Monuments (placement) to include excavation concrete base,city monument,monument box, and box cover,cleanup and proper disposal of waste Monument to be set and elevation certification provided by a licensed surveyor.Reference detail 27, for the sum of	\$560.00	\$14,000.00	\$575.00	\$14,375.00		\$0.00		\$0.00

07 JUL 30 PM 2:50
CITY OF EL PASO PARK DEPT.

APPROVED BY: *mwp*

CITY OF EL PASO BID TABULATION

BID TITLE: CITYWIDE REPAIR / CONSTRUCTION OF PARKWAY STRUCTURES 2007-2009
 BID DATE: JULY 11, 2007

BID NO: 2007-201
 DEPARTMENT: STREETS

				C & C ROAD CONSTRUCTION, INC. EL PASO, TEXAS		J. A. R. CONCRETE, INC. EL PASO, TEXAS					
ITEM #	EST. QTY	UNITS	DESCRIPTION	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL
83	200	S.Y.	Concrete Pavers (replacement) to include excavation preparation and compaction of subgrade, placement of concrete pavers backfill, cleanup and proper disposal of waste materials Reference Detail 28, for the sum of	\$32.00	\$6,400.00	\$44.00	\$8,800.00		\$0.00		\$0.00
84	10	EACH	Installation of 6-inch reinforced concrete aprons in roadway around water valves city monuments and manholes, includes proper elevation adjustment of valves monument housing manholes and concrete bells for the sum of	\$150.00	\$1,500.00	\$190.00	\$1,900.00		\$0.00		\$0.00
85	10	EACH	Housing manholes and concrete bells for the sum of	\$200.00	\$2,000.00	\$190.00	\$1,900.00		\$0.00		\$0.00
86	300	CY	Two-Sack backfill, for the sum of	\$80.00	\$24,000.00	\$80.00	\$24,000.00		\$0.00		\$0.00
SUB TOTAL BASE BID I (Line Items #1 - # 86)					\$3,472,000.00		\$2,581,425.00				

CITY CLERK DEPT.
 01 JUL 30 PM 2:50

APPROVED BY: *MWP 7-13-07*

CITY OF EL PASO BID TABULATION

BID TITLE: CITYWIDE REPAIR / CONSTRUCTION OF PARKWAY STRUCTURES 2007-2009
 BID DATE: JULY 11, 2007

BID NO: 2007-201
 DEPARTMENT: STREETS

				C & C ROAD CONSTRUCTION, INC. EL PASO, TEXAS		J. A. R. CONCRETE, INC. EL PASO, TEXAS					
ITEM #	EST. QTY	UNITS	DESCRIPTION	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL
BASE BID II											
1	3,700	L.F.	PVC conduit 3-inch installed by trenching to include sawcut excavation, backfill compaction pavement removal and patching and disposal of waste material.Reference Division VI,"Installation of Conduit, Loops,Foundations and Ground Boxes Specifications: for the sum of	\$14.60	\$54,020.00	\$14.10	\$52,170.00		\$0.00		\$0.00
2	14,000	L.F.	PVC Conduit 2-inch installed by trenching; to include, saw-cut,excavation,backfill, compaction,pavement removal & patching,and disposal of waste material.Reference Division VI,"Installation of Conduit,Loops Foundations, and Ground Boxes" Specifications: for the sum of	\$8.70	\$121,800.00	\$9.50	\$133,000.00		\$0.00		\$0.00
3	4,400	L.F.	PVC Conduit 3- inch installed by directional boring; to include,boring excavation, backfill,compaction,pavement removal and patching, and disposal of waste material. Reference Division VI, "Installation of Conduit Loops, Foundations, and Ground Boxes" Specifications; for the sum of	\$32.25	\$141,900.00	\$31.25	\$137,500.00		\$0.00		\$0.00

07 JUL 30 PM 2:50
CITY CLERK DEPT.

APPROVED BY: *MWP*

CITY CLERK DEPT.

CITY OF EL PASO BID TABULATION

BID TITLE: CITYWIDE REPAIR / CONSTRUCTION OF PARKWAY STRUCTURES 2007-2009
 BID DATE: JULY 11, 2007

BID NO: 2007-201
 DEPARTMENT: STREETS

				C & C ROAD CONSTRUCTION, INC. EL PASO, TEXAS		J. A. R. CONCRETE, INC. EL PASO, TEXAS					
ITEM #	EST. QTY	UNITS	DESCRIPTION	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL
BASE BID II											
4	3,200	L.F.	PVC Conduit 2-inch installed by directional boring; to include boring, excavation, backfill, compaction,pavement removal and patching and disposal of waste material.Reference Division VI "Installation of Conduit, Loops, Foundations and Ground Boxes" Specifications; for the sum of	\$24.25	\$77,600.00	\$23.50	\$75,200.00		\$0.00		\$0.00
5	175	EACH	Ground Box Type A installed in place; to include excavation backfill,compaction concrete removal & patching, and disposal of waste material Reference Division VI, "Installation of Conduit Loops Foundations and Ground Boxes" Specifications; for the sum of	\$498.00	\$87,150.00	\$520.00	\$91,000.00		\$0.00		\$0.00
6	20	EACH	Ground Box Type C installed in place to include excavation backfill,compaction,concrete removal & patching and disposal of waste material.Reference Division VI,"Installation of Conduit Loops,Foundations and Ground Boxes" Specifications for the sum of	\$622.00	\$12,440.00	\$650.00	\$13,000.00		\$0.00		\$0.00

APPROVED BY: *MWP*

CITY CLERK DEPT.
07 JUL 30 PM 2:50

CITY OF EL PASO BID TABULATION

BID TITLE: CITYWIDE REPAIR / CONSTRUCTION OF PARKWAY STRUCTURES 2007-2009
 BID DATE: JULY 11, 2007

BID NO: 2007-201
 DEPARTMENT: STREETS

				C & C ROAD CONSTRUCTION, INC. EL PASO, TEXAS		J. A. R. CONCRETE, INC. EL PASO, TEXAS					
ITEM #	EST. QTY	UNITS	DESCRIPTION	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL
BASE BID II											
7	75	EACH	Foundation, Traffic Signal Type 24a installed in place to include,excavation,backfill compaction, concrete removal & patching and disposal of waste material.Reference Division VI "Installation of Conduit, Loops, Foundations and Ground Boxes" Specifications; for the sum of	\$653.00	\$48,975.00	\$632.00	\$47,400.00		\$0.00		\$0.00
8	30	EACH	Foundation, Traffic Signal Type 30A installed in place to include excavation,backfill compaction,concrete removal & patching,and disposal of waste material.Reference Division VI,"Installation of Conduit Loops,Foundations and Ground Boxes" Specifications; for the sum of	\$2,115.00	\$63,450.00	\$2,200.00	\$66,000.00		\$0.00		\$0.00
9	42	EACH	Foundation,Traffic signal Type 36A installed in place to include excavation,backfill compaction concrete removal & patching,and disposal of waste material.Reference Division VI,"Installation of Conduit,Loops,Foundations and Ground Boxes" Specifications; for the sum of	\$2,364.00	\$99,288.00	\$2,500.00	\$105,000.00		\$0.00		\$0.00

APPROVED BY: *MWP*

CITY CLERK DEPT.
07 JUL 30 PM 2:50

CITY OF EL PASO BID TABULATION

BID TITLE: CITYWIDE REPAIR / CONSTRUCTION OF PARKWAY STRUCTURES 2007-2009
 BID DATE: JULY 11, 2007

BID NO: 2007-201
 DEPARTMENT: STREETS

				C & C ROAD CONSTRUCTION, INC. EL PASO, TEXAS		J. A. R. CONCRETE, INC. EL PASO, TEXAS					
ITEM #	EST. QTY	UNITS	DESCRIPTION	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL
BASE BID II											
10	15	EACH	Foundation, Traffic Controller installed in place; to include excavation,backfill,compaction concrete removal & patching and disposal of waste material. Reference Division VI, "Installation of Conduit, Loops,Foundations, and Ground Boxes" Specifications; for the sum of	\$1,493.00	\$22,395.00	\$1,600.00	\$24,000.00		\$0.00		\$0.00
11	1,000	LF	Loop Detector, PVC Frane Type installed in place; to include excavation,backfill compaction,concrete removal & patching,and disposal of waste material.Reference Division VI,"Installation of Conduit Loops,Foundations and Ground Boxes" Specifications; for the sum of	\$23.50	\$23,500.00	\$14.00	\$14,000.00		\$0.00		\$0.00
12	1,000	L.F.	Loop Detector, Saw Cut Type installed in place; to include, saw cut loop sealant excavation backfill,compaction concrete removal & patching and disposal of waste material Reference Division VI "Installation of Conduit Loop Foundations, and Ground Boxes" Specifications for the sum of	\$15.00	\$15,000.00	\$10.00	\$10,000.00		\$0.00		\$0.00

APPROVED BY: *MWP*

CITY CLERK DEPT.
07 JUL 30 PM 2:50

CITY OF EL PASO BID TABULATION

BID TITLE: CITYWIDE REPAIR / CONSTRUCTION OF PARKWAY STRUCTURES 2007-2009
 BID DATE: JULY 11, 2007

BID NO: 2007-201
 DEPARTMENT: STREETS

				C & C ROAD CONSTRUCTION, INC. EL PASO, TEXAS		J. A. R. CONCRETE, INC. EL PASO, TEXAS					
ITEM #	EST. QTY	UNITS	DESCRIPTION	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL	SUM OF(UNITS)	TOTAL
SUB TOTAL BASE BID II (Line Items #1 - # 12)					\$767,518.00		\$768,270.00				
SUB TOTAL BASE BID I and BASE BID II					\$4,239,518.00		\$3,349,695.00				
OPTION TO EXTEND THE TERM OF THE AGREEMENT Bidder offers the City the Option of extending the term of the contract for one or two additional year term at the same unit prices A. Twelve (12) months additional term B. Twenty Four (24) months additional term C. NO OPTION OFFERED				NO NO NO		YES YES					
BID BOND SUBMITTED				YES		YES					
AMENDMENTS ACKNOWLEDGED				YES		YES					

APPROVED BY: *MWP 7-13-07*

CITY CLERK DEPT.
 07 JUL 30 PM 2:50